



Test Data & Material Characteristics

Hardscape Products Ltd.

Date of Certificate

25

09/12/2025

BS EN 1344:2013

Clay pavers for Internal & external use, pedestrian &/ vehicular use for flexible/ rigid laying

Commercial name:

Supraton UWF Tumbled

Country of Manufacture:


The Netherlands

Dimensions / Dimensional Deviation:

200 x 50 x 60 mm / R1

Pack weight/qty:

1766 Kg / 1040 pcs

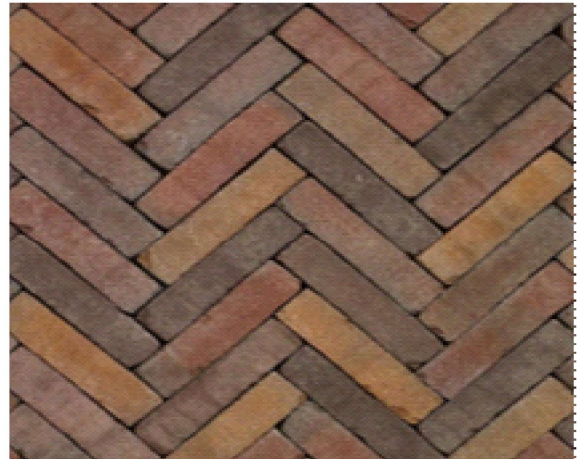

Characteristic	Value	Testing Method Standard
Breaking Strength (Transverse breaking load) Class:	T4	BS EN 1344:2013 Annex D
Unpolished Slip/ Skid Resistance Class:	U3	CEN/TS 16165:2012
Durability (Freeze/thaw resistance)	FP100	BS EN 1344:2013 Annex C
Abrasion Resistance	A1	BS EN 1344:2013 Annex E
Water Absorption	< 5%	EN 13755
Light Reflectance Value (LRV)	NPD	BS 8493: 2008+A1:2010

All tests conform to the specific standard requirements and test methods for the material types as detailed below:

Signed:



HARDSCAPE
PRODUCTS



Hardscape Products Ltd., Eagley House, Deakins Business Park, Egerton, Bolton, Lancashire, BL7 9RP

Telephone 01204 565 500

Email enq@hardscape.co.uk

Website: <https://hardscape.co.uk/>