


Natural Stone / Sandstone / China / Caithness | Black

# Caithness

## Black

Widely used in the UK primarily as a commercial paving product in bespoke-sized setts, planks and paving.

| SPECIFICATION                                 | SKU: SAN-SCO-CAI-003   |   |
|---|------------------------|---|
| Material                                      | Sandstone              |   |
| Finish  | Riven                  |   |
| Density                                       | -                      | 2650 kg/m <sup>3</sup>                                      |
| GWP (total) kgCO2e                            | ISO 14025 / EN 15804   | -   |
| Compressive Strength                          | BS EN 1926:2006        | 152 Mpa   |
| Compressive Strength (Freeze/Thaw Resistance) | BS EN 1926:2006        | 209 / 197 Mpa   |
| PPV (Before/After)                            | BS EN 7932:2003        | NPD   |
| Flexural Freeze/Thaw                          | BS EN 12371:2010       | 35.0 / 32.7 MPa   |
| Flexural Strength                             | BS EN 12372:2006       | 29.2 MPa  |
| Light Reflectance Value                       | BS EN 84369:2008       | Antique 15.5 : Riven 7.7 :<br>Sawn 9.9 :Shotblasted 9.7 LRV |
| Open Porosity                                 | BS EN 1936:2006        | 0.4%  |
| Slip Resistance                               | BS EN 13036-4, BS 7976 | Sawn 69 (wet), 96 (dry) SRV/USRV                            |
| Water Absorption                              | BS EN 13755:2008       | 0.2%  |
| Abrasion Resistance                           | BS EN 14157:2004       | 22.5mm  |

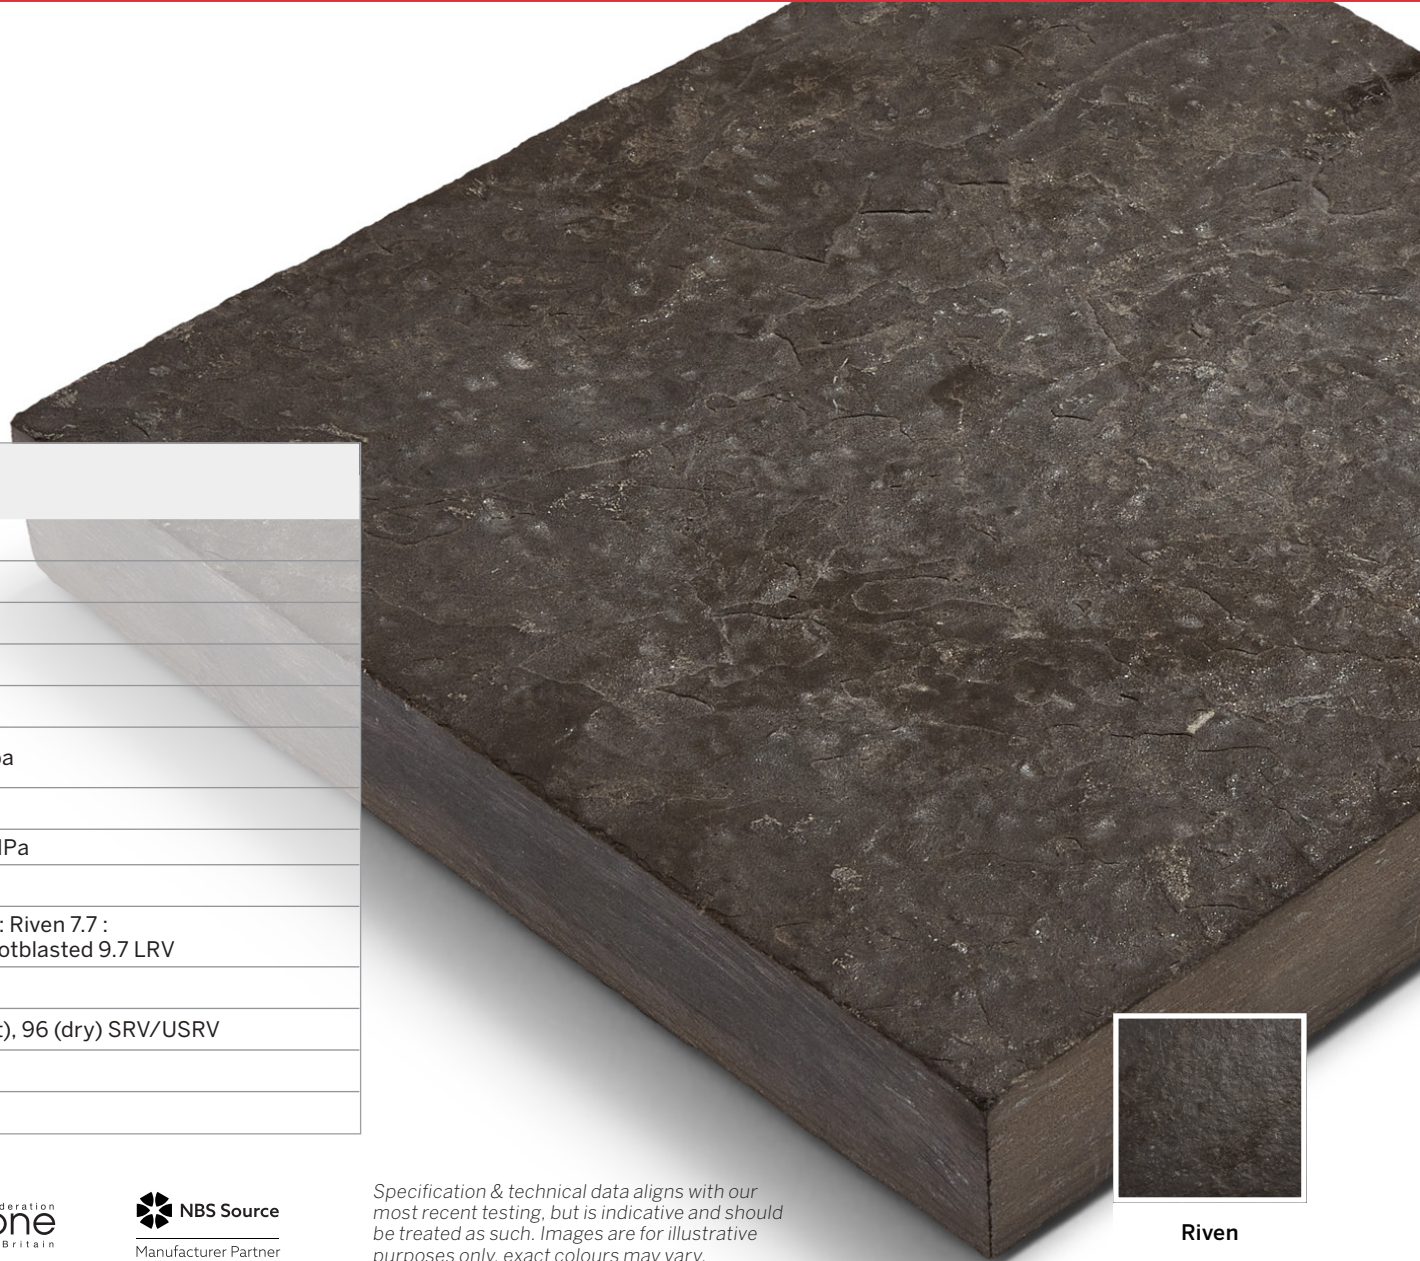

Riven



Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.