


Natural Stone / Sandstone / Scotland / Denfind | Angus

Denfind

Angus

Quarried in Pitairlie and characterised by a distinctive, varied colour palette shaped by the geological presence of iron and manganese oxides.

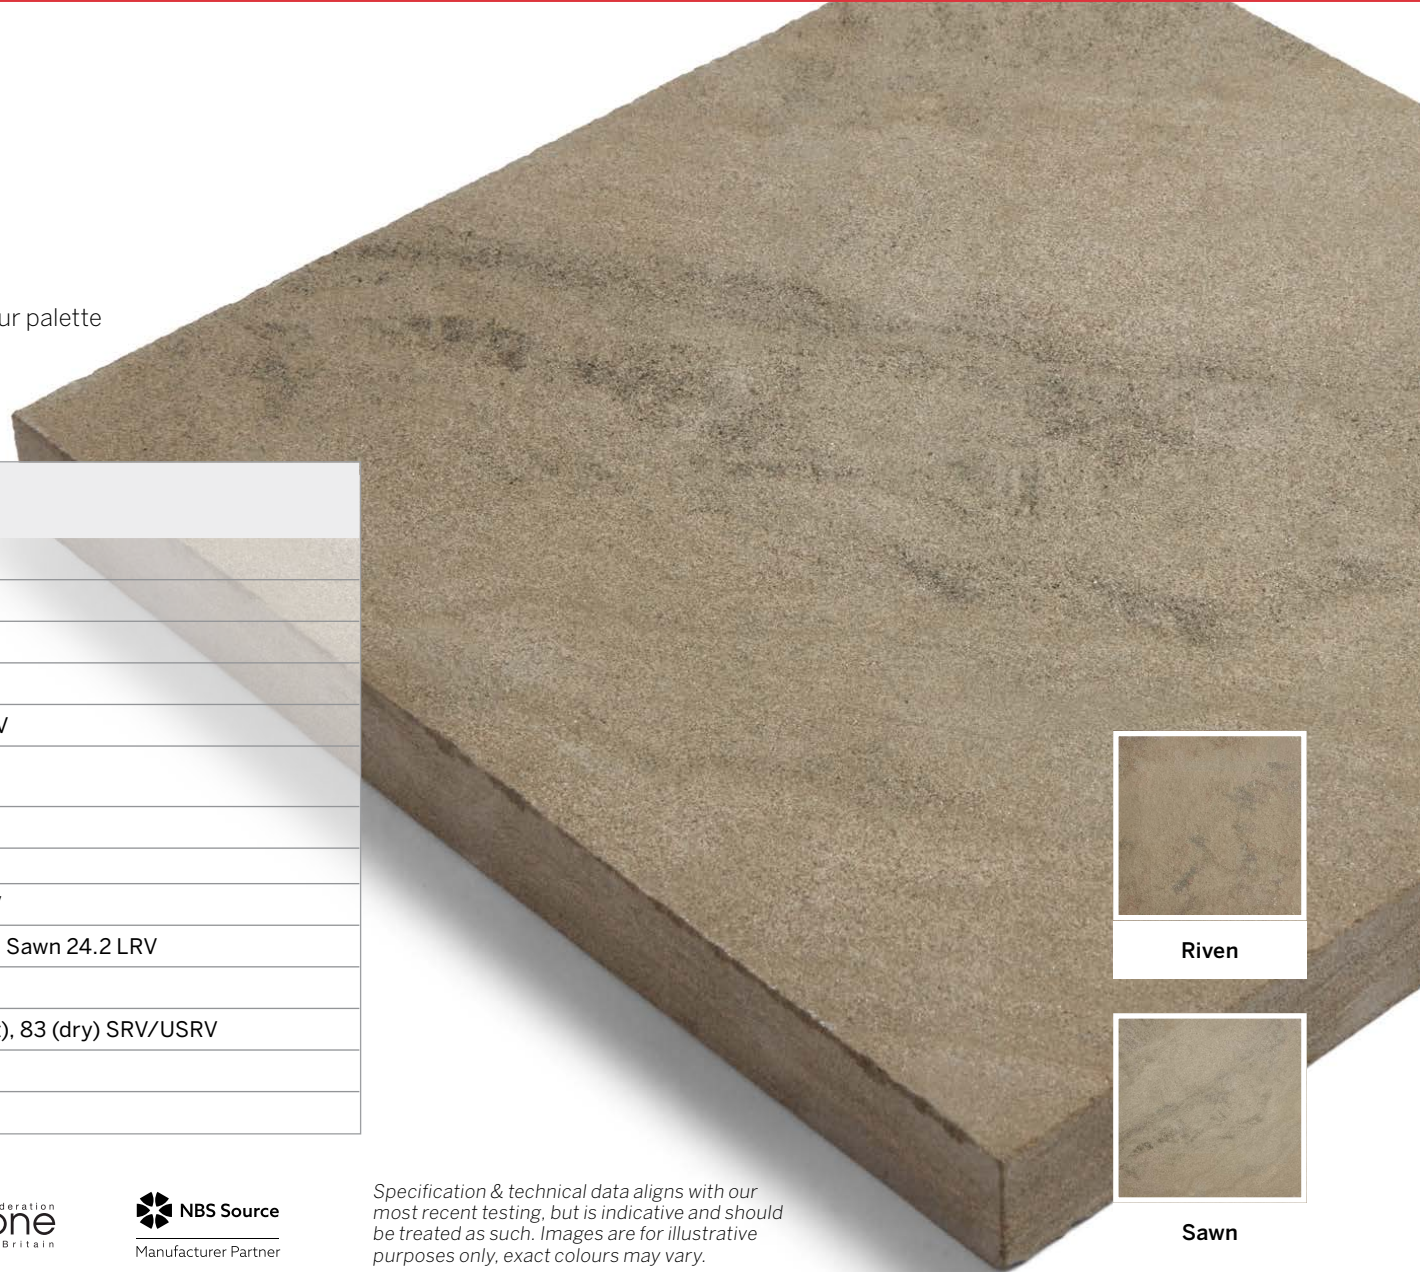

SPECIFICATION	SKU: SAN-SCO-DEN-025	
Material	Sandstone	
Finish	Riven, Sawn	
Density	-	2400 kg/m ³
GWP (total) kgCO ₂ e	ISO 14025 / EN 15804	0.127 per kg
Compressive Strength	BS EN 1926:2006	42.6 MPa LEV
Compressive Strength (Freeze/Thaw Resistance)	BS EN 1926:2006	NPD
PPV (Before/After)	BS EN 7932:2003	NPD
Flexural Freeze/Thaw	BS EN 12371:2010	NPD
Flexural Strength	BS EN 12372:2006	11.9 MPa LEV
Light Reflectance Value	BS EN 84369:2008	Flamed 16.0 : Sawn 24.2 LRV
Open Porosity	BS EN 1936:2006	8.3%
Slip Resistance	BS EN 13036-4, BS 7976	Sawn 76 (wet), 83 (dry) SRV/USRV
Water Absorption	BS EN 13755:2008	NPD
Abrasion Resistance	BS EN 14157:2004	23.44mm



Riven



Sawn



Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.