



Natural Stone / Granite / Portugal / Mara | Botao

Mara


Botao

Suitable for all applications including paving, steps, setts, walling, tactiles and bespoke specials.


SPECIFICATION	SKU: GRA-POR-MAR-006	
Material	Granite	
Finish	Bush Hammered, Flamed, Honed, Polished, Sandblasted, Sawn	
Density	-	2610 kg/m ³
GWP (total) kgCO ₂ e	ISO 14025 / EN 15804	0.035 per kg
Compressive Strength	BS EN 1926:2006	166 MPa LEV
Compressive Strength (Freeze/Thaw Resistance)	BS EN 1926:2006	NPD
PPV (Before/After)	BS EN 7932:2003	NPD
Flexural Freeze/Thaw	BS EN 12371:2010	9.8 / 9.7 MPa Mean
Flexural Strength	BS EN 12372:2006	5 MPa LEV
Light Reflectance Value	BS EN 84369:2008	Flamed 19-57 Range : Bush Hammered 22-48 Range LRV
Open Porosity	BS EN 1936:2006	1.5%
Slip Resistance	BS EN 13036-4, BS 7976	Sawn 74 (wet), 81 (dry) SRV/USRV
Water Absorption	BS EN 13755:2008	0.6%
Abrasion Resistance	BS EN 14157:2004	17mm

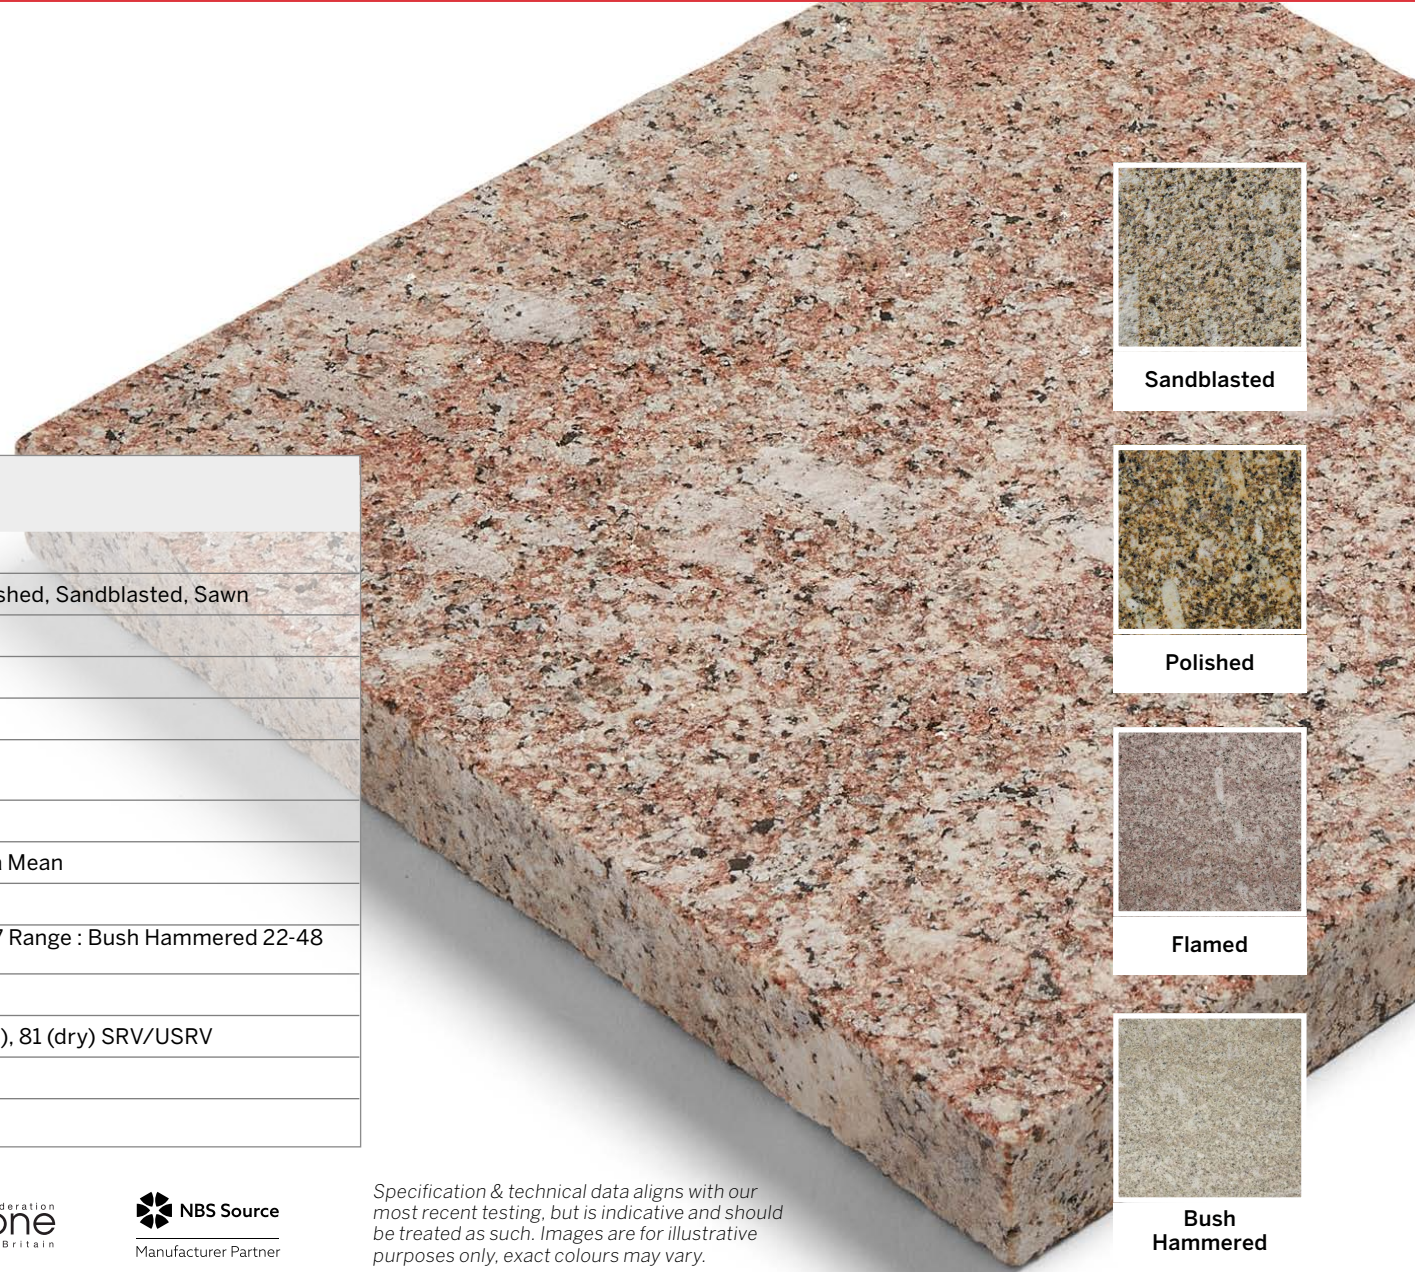

Sandblasted



Polished



Flamed



Bush Hammered



Specification & technical data aligns with our most recent testing, but is indicative and should be treated as such. Images are for illustrative purposes only, exact colours may vary.