


Civils & Highways / Active Travel Kerbs / Access

Access 40-150x250

40-150x250 | Transition | to 130-150x250 | L-500 | Splay | VBVB

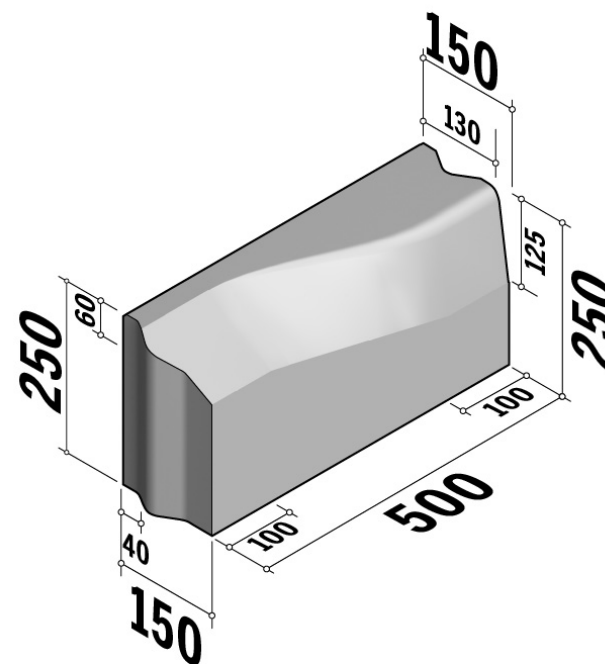

SPECIFICATION

Access 40-150x250 | 40-150x250 | Transition | to 130-150x250 | L-500 | Splay | VBVB

SKU: ATK-ACC-002-6603

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavarø
Size	40-150(w) x 250(d) x 500(l)
Weight Per Unit	41kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	4.37 kgCO ₂ e/unit
Dutch Ref.	VERLOOPBANDEN-4-15x25_13-15x25xL50-VBVB
Type	Transition
End Style	VBVB
Profile	40-150x250
Position	-
Face	Splay_Half-Battered
Face Angle	29°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

Active Travel Kerbs are available in a range of colours, finishes and materials.

 View product online at : <https://hardscape.co.uk/product/Access-40-150x250-40-150x250-Transition-to-130-150x250-L-500-Splay-VBVB/>