

Civils & Highways / Active Travel Kerbs / Cycle

Cycle 50-200x250


50-200x250 | Radius | L-785 | Internal | 1m | Splay | HD

SPECIFICATION

Cycle 50-200x250 | 50-200x250 | Radius | L-785 | Internal | 1m | Splay | HD

SKU: ATK-ACC-004-6619

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavaró
Size	50-200(w) x 250(d) x 785(l)
Weight Per Unit	82.43kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	8.78 kgCO ₂ e/unit
Dutch Ref.	GELEIDBOCHTBANDEN-5-20x25xL78.5-1m-HD-inw
Type	Radius Internal
End Style	HD
Profile	50-200x250
Position	-
Face	Splay
Face Angle	18°
Return Angle	-
Radius	1m
Number per 360	8
Slope Angle	-
Slope Gradient	-

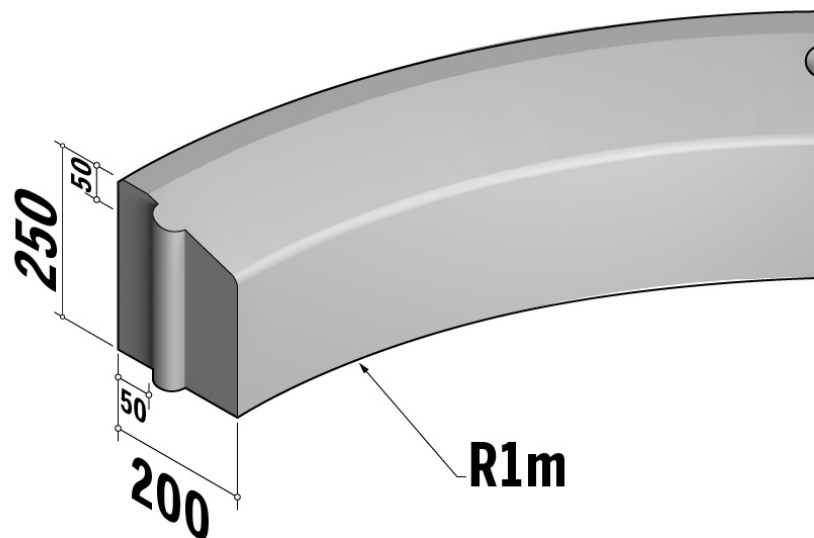

Active Travel Kerbs are available in a range of colours, finishes and materials.