

Civils & Highways / Active Travel Kerbs / Access

Access 70-200x250


70-200x250 | Transition | to 200x250 | L-1000 | Splay | VBHD

SPECIFICATION

Access 70-200x250 | 70-200x250 | Transition | to 200x250 | L-1000 | Splay | VBHD

SKU: ATK-ACC-006-6665

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavarö
Size	70-200(w) x 250(d) x 1000(l)
Weight Per Unit	112kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	11.93 kgCO ₂ e/unit
Dutch Ref.	VERLOOPBANDEN-7-20x25_20x25xL100-VBHD
Type	Transition
End Style	VBHD
Profile	70-200x250
Position	-
Face	Splay_Flat
Face Angle	28°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

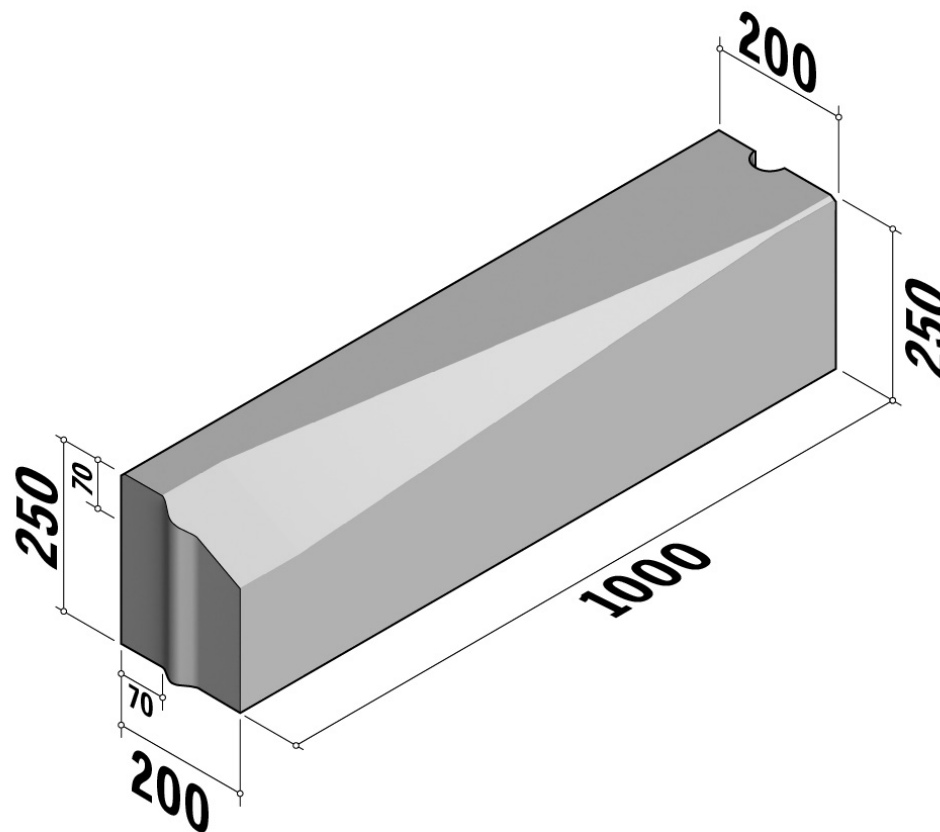

Active Travel Kerbs are available in a range of colours, finishes and materials.