

Civils & Highways / Active Travel Kerbs / Access

Access 250-130x200


250-130x200 | Radius | L-785 | External | 0.5m | Splay | VB

SPECIFICATION

Access 250-130x200 | 250-130x200 | Radius | L-785 | External | 0.5m | Splay | VB

SKU: ATK-ACC-007-6670

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavar, Metallo
Size	250-130(w) x 200(d) x 785(l)
Weight Per Unit	76.7kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	8.17 kgCO ₂ e/unit
Dutch Ref.	PWS-BOCHTBANDEN-25-13x20xL78.5-0.5m-VB
Type	Radius External
End Style	VB
Profile	250-130x200
Position	-
Face	Splay
Face Angle	16°
Return Angle	-
Radius	0.5m
Number per 360	4
Slope Angle	-
Slope Gradient	-

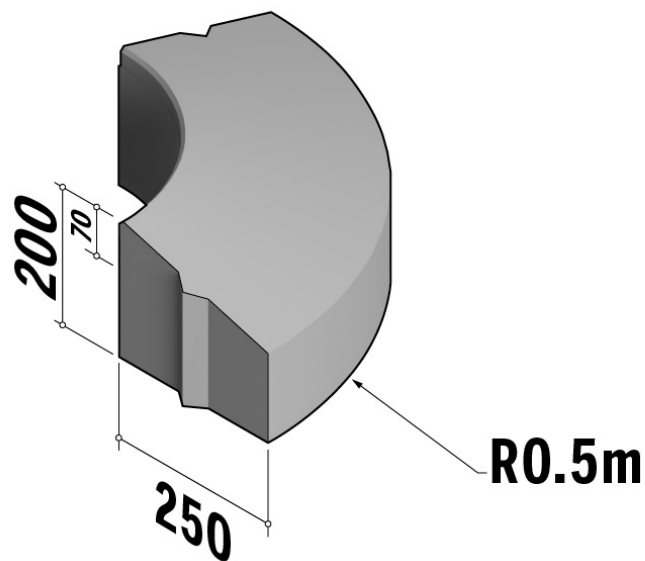

Active Travel Kerbs are available in a range of colours, finishes and materials.