

Civils & Highways / Active Travel Kerbs / Access

Access 250-130x240


250-130x240 | Radius | L-785 | External | 1m | Splay | VB

SPECIFICATION

Access 250-130x240 | 250-130x240 | Radius | L-785 | External | 1m | Splay | VB

SKU: ATK-ACC-008-6684

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavaró
Size	250-130(w) x 240(d) x 785(l)
Weight Per Unit	89.3kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	9.52 kgCO ₂ e/unit
Dutch Ref.	PWS-BOCHTBANDEN-25-13x24xL78.5-1m-VB
Type	Radius External
End Style	VB
Profile	250-130x240
Position	-
Face	Splay
Face Angle	26°
Return Angle	-
Radius	1m
Number per 360	8
Slope Angle	-
Slope Gradient	-

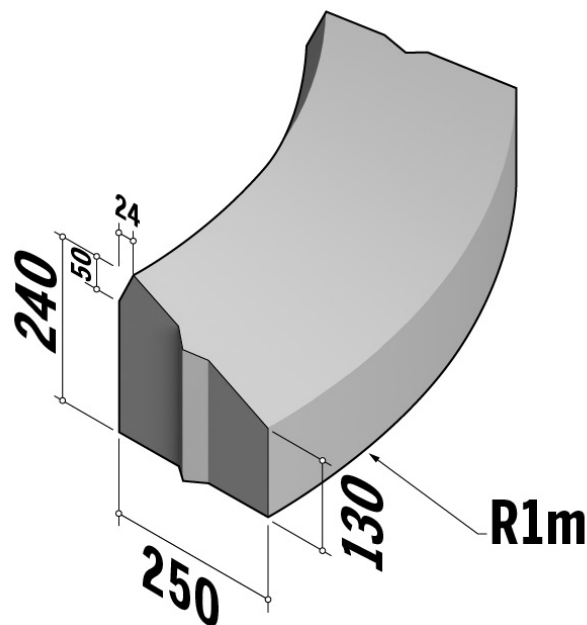

Active Travel Kerbs are available in a range of colours, finishes and materials.