

Civils & Highways / Active Travel Kerbs / Bump

# Bump 200


200x170 | Straight | L-900 | Left | Rounded | SQ

## SPECIFICATION

**Bump 200 | 200x170 | Straight | L-900 | Left | Rounded | SQ**

**SKU:** ATK-BMP-003-6818

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Material                        | Concrete, Kellen                    |
| Finish                          | Standard Wet Cast, Optiflex, Lavarò |
| Size                            | 200(w) x 170(d) x 900(l)            |
| Weight Per Unit                 | 52kg                                |
| Manufacturing Standard          | BS EN 1340:2003                     |
| Density                         | 2350 kg/m <sup>3</sup>              |
| GWP (total) kgCO <sub>2</sub> e | 5.54 kgCO <sub>2</sub> e/unit       |
| Dutch Ref.                      | STOOTBANDEN-20x17xL90-LINKS         |
| Type                            | Straight                            |
| End Style                       | SQ                                  |
| Profile                         | 200x170                             |
| Position                        | Left                                |
| Face                            | Rounded                             |
| Face Angle                      | -                                   |
| Return Angle                    | -                                   |
| Radius                          | -                                   |
| Number per 360                  | -                                   |
| Slope Angle                     | -                                   |
| Slope Gradient                  | -                                   |

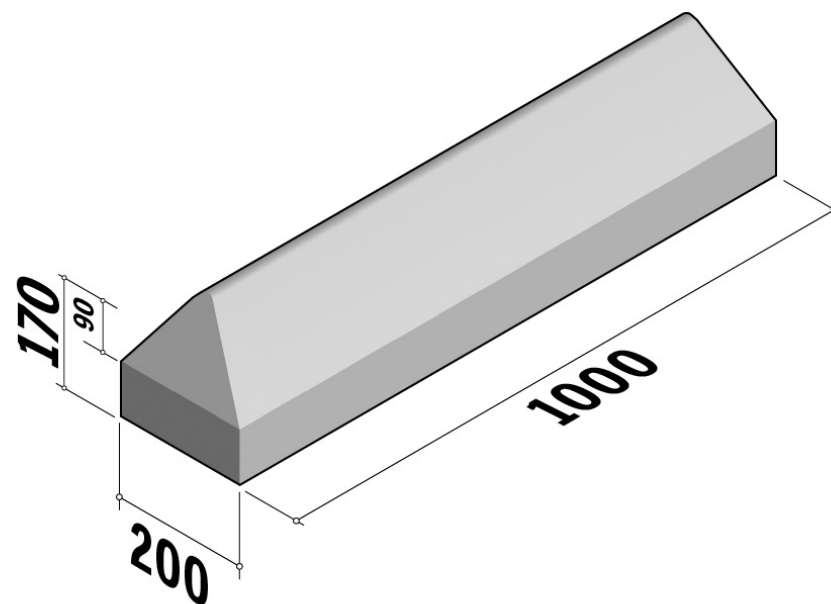

Active Travel Kerbs are available in a range of colours, finishes and materials.