

Civils & Highways / Active Travel Kerbs / Bump

Bump 250


250x250 | Straight | L-1000 | Middle | Rounded | SQ

SPECIFICATION

Bump 250 | 250x250 | Straight | L-1000 | Middle | Rounded | SQ

SKU: ATK-BMP-005-6826

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavarö
Size	250(w) x 250(d) x 1000(l)
Weight Per Unit	140kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	14.92 kgCO ₂ e/unit
Dutch Ref.	STOOTBANDEN-25x25xL100-MIDDEN
Type	Straight
End Style	SQ
Profile	250x250
Position	Middle
Face	Rounded
Face Angle	-
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

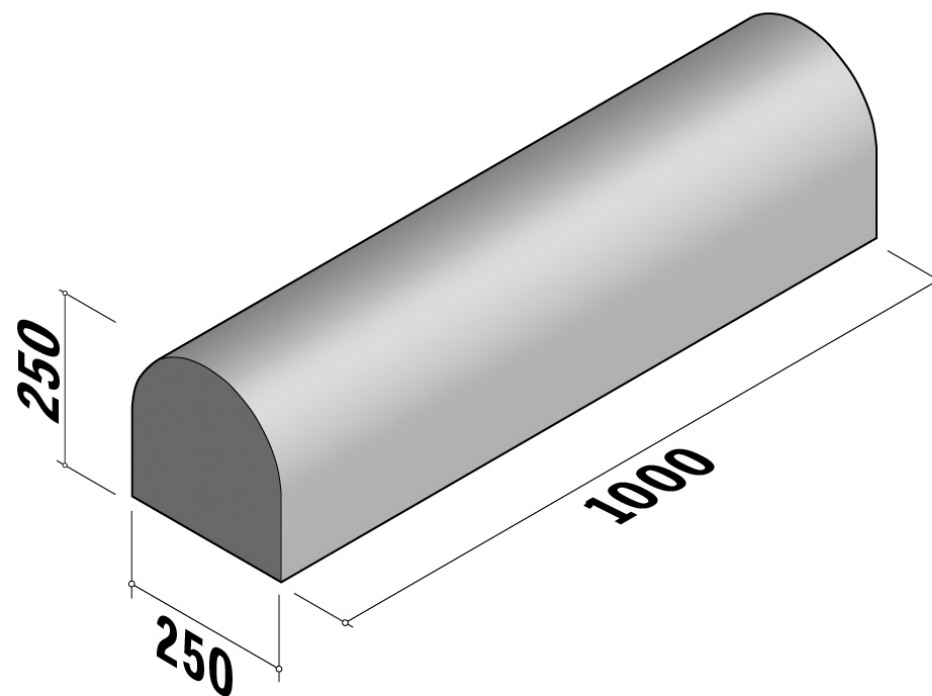

Active Travel Kerbs are available in a range of colours, finishes and materials.