

Civils & Highways / Active Travel Kerbs / British Standard

SP2


Drop Transition | 125x255 to BN3 125x150xL914 | Right | SQ

SPECIFICATION

SP2 | Drop Transition | 125x255 to BN3 125x150xL914 | Right | SQ

SKU: ATK-BST-SP2-9702

Material	Concrete
Finish	Standard
Size	125(w) x 255(d) x 914(l)
Weight Per Unit	52kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	-
Dutch Ref.	-
Type	Drop Transition
End Style	SQ
Profile	125x255
Position	Right
Face	Splay
Face Angle	45°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

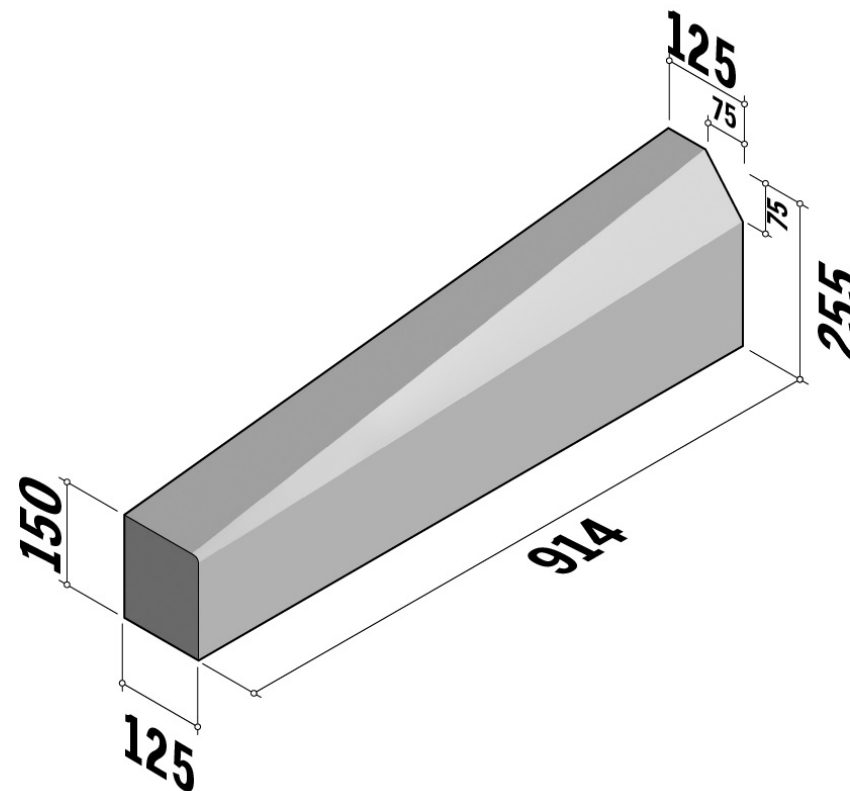

Active Travel Kerbs are available in a range of colours, finishes and materials.