

Civils & Highways / Active Travel Kerbs / Bus Stop

# Bus Stop HOV


250-300x400 | Straight | L-2000 | Half-Battered | VVB

## SPECIFICATION

**Bus Stop HOV | 250-300x400 | Straight | L-2000 | Half-Battered | VVB**

**SKU:** ATK-BUS-001-6733

|                                 |                                |
|---------------------------------|--------------------------------|
| Material                        | Concrete, Kellen               |
| Finish                          | ZVB, Lavarò                    |
| Size                            | 250-300(w) x 400(d) x 2000(l)  |
| Weight Per Unit                 | 530kg                          |
| Manufacturing Standard          | BS EN 1340:2003                |
| Density                         | 2350 kg/m <sup>3</sup>         |
| GWP (total) kgCO <sub>2</sub> e | 56.47 kgCO <sub>2</sub> e/unit |
| Dutch Ref.                      | HOV-BANDEN-25-30x40xL200-VVB   |
| Type                            | Straight                       |
| End Style                       | VVB                            |
| Profile                         | 250-300x400                    |
| Position                        | -                              |
| Face                            | Half-Battered                  |
| Face Angle                      | 74°                            |
| Return Angle                    | -                              |
| Radius                          | -                              |
| Number per 360                  | -                              |
| Slope Angle                     | -                              |
| Slope Gradient                  | -                              |

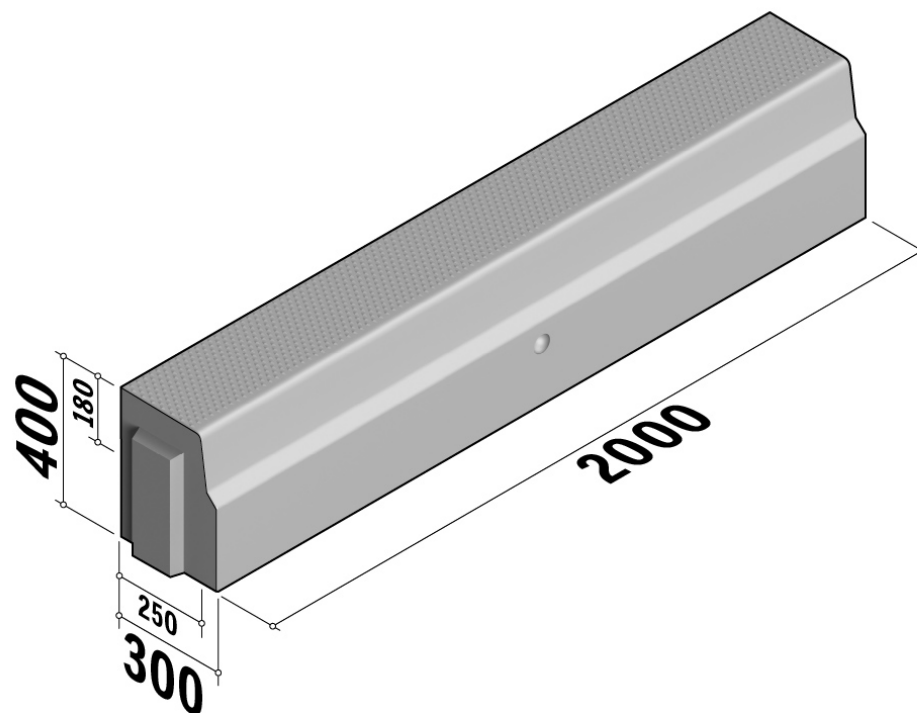

Active Travel Kerbs are available in a range of colours, finishes and materials.

View product online at : <https://hardscape.co.uk/product/Bus-Stop-HOV-250-300x400-Straight-L-2000-Half-Battered-VVB/>