

Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150


Highway 130-150x120 HD

130-150x120 HD | Radius | L-700 | External | 0.45m | Half-Battered | HD

SPECIFICATION

Highway 130-150x120 HD | 130-150x120 HD | Radius | L-700 | External | 0.45m | Half-Battered | HD
SKU: ATK-HWA-001-5203

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavarø
Size	130-150(w) x 120(d) x 700(l)
Weight Per Unit	22.3kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	2.38 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-13-15x12xL70-0.45m-HD
Type	Radius External
End Style	HD
Profile	130-150x120
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	0.45m
Number per 360	4
Slope Angle	-
Slope Gradient	-

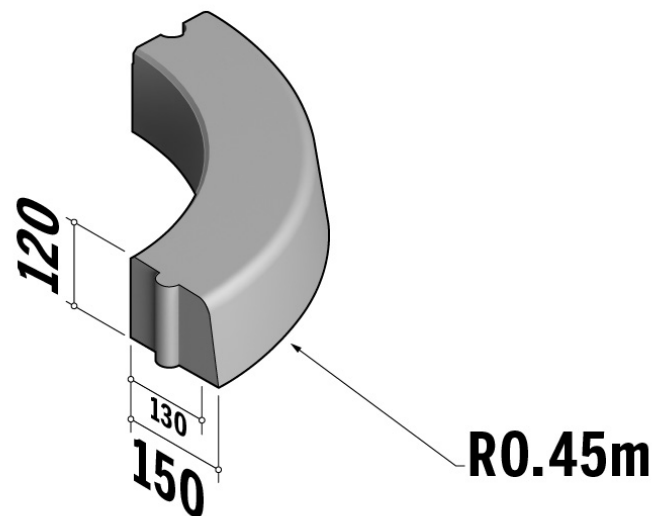

Active Travel Kerbs are available in a range of colours, finishes and materials.