

Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150


Highway 130-150x160 VB

130-150x160 VB | Radius | L-590 | Internal | 0.75m | Half-Battered | VB

SPECIFICATION

Highway 130-150x160 VB | 130-150x160 VB | Radius | L-590 | Internal | 0.75m | Half-Battered | VB
SKU: ATK-HWA-002-5215

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò
Size	130-150(w) x 160(d) x 590(l)
Weight Per Unit	34.3kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	3.65 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-13-15x16xL59-0.75m-VB-inw
Type	Radius Internal
End Style	VB
Profile	130-150x160
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	0.75m
Number per 360	8
Slope Angle	-
Slope Gradient	-

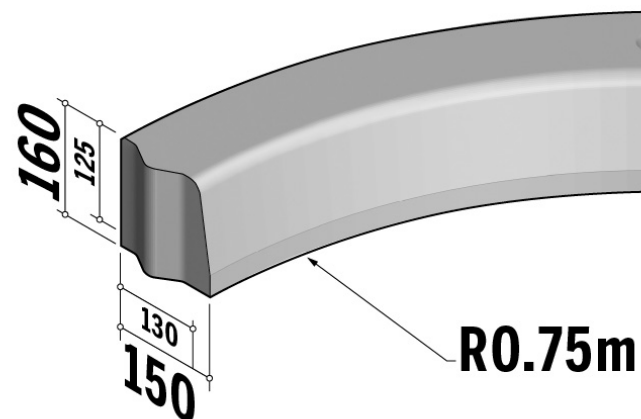

Active Travel Kerbs are available in a range of colours, finishes and materials.