

Civils &amp; Highways / Active Travel Kerbs / Highway / Highway 130-150

# Highway 130-150x160 VB


130-150x160 VB | Return Point | 165° | 0.3m | Half-Battered | VB

## SPECIFICATION

Highway 130-150x160 VB | 130-150x160 VB | Return Point | 165° | 0.3m | Half-Battered | VB

SKU: ATK-HWA-002-5246

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Material                        | Concrete, Kellen                  |
| Finish                          | Standard Wet Cast, Lavarò         |
| Size                            | 130-150(w) x 160(d)               |
| Weight Per Unit                 | 45.65kg                           |
| Manufacturing Standard          | BS EN 1340:2003                   |
| Density                         | 2350 kg/m <sup>3</sup>            |
| GWP (total) kgCO <sub>2</sub> e | 4.86 kgCO <sub>2</sub> e/unit     |
| Dutch Ref.                      | PUNTSTUKKEN-13-15x16-0.3m-165°-VB |
| Type                            | Return Point                      |
| End Style                       | VB                                |
| Profile                         | 130-150x160                       |
| Position                        | -                                 |
| Face                            | Half-Battered                     |
| Face Angle                      | 81°                               |
| Return Angle                    | 165°                              |
| Radius                          | 0.3m                              |
| Number per 360                  | -                                 |
| Slope Angle                     | -                                 |
| Slope Gradient                  | -                                 |

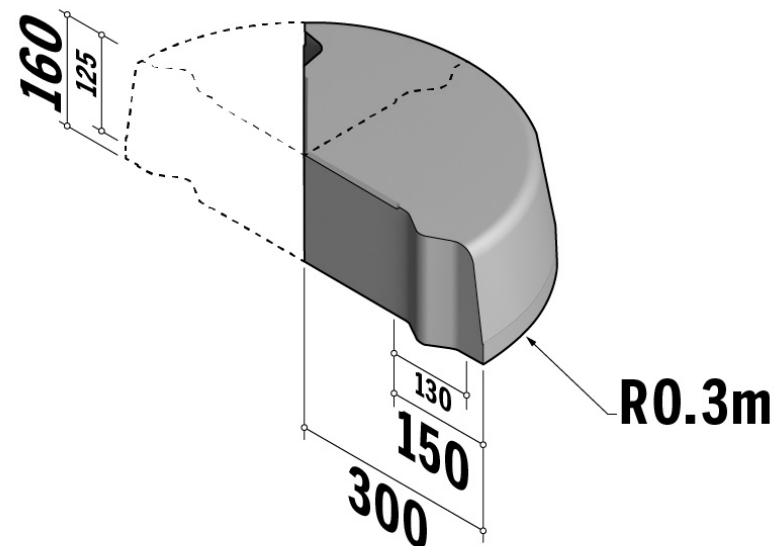

Available in 5° increments

Active Travel Kerbs are available in a range of colours, finishes and materials.

 View product online at : <https://hardscape.co.uk/product/Highway-130-150x160-VB-130-150x160-VB-Return-Point-165-0-3m-Half-Battered-VB/>