

Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150


Highway 130-150x250 HD

130-150x250 HD | Radius | L-470 | Internal | 0.6m | Half-Battered | HD

SPECIFICATION

Highway 130-150x250 HD | 130-150x250 HD | Radius | L-470 | Internal | 0.6m | Half-Battered | HD
SKU: ATK-HWA-005-5406

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavaró
Size	130-150(w) x 250(d) x 470(l)
Weight Per Unit	45.3kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	4.83 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-13-15x25xL47-0.6m-HD-inw
Type	Radius Internal
End Style	HD
Profile	130-150x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	0.6m
Number per 360	8
Slope Angle	-
Slope Gradient	-

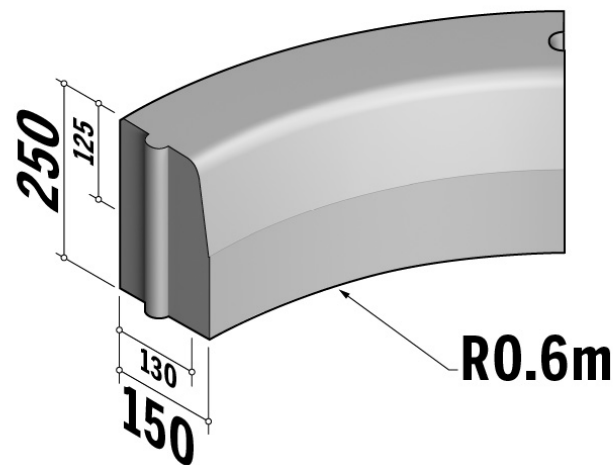

Active Travel Kerbs are available in a range of colours, finishes and materials.