

Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150

Highway 130-150x250 HD


130-150x250 HD | Radius | L-785 | Internal | 8m | Half-Battered | HD

SPECIFICATION

Highway 130-150x250 HD | 130-150x250 HD | Radius | L-785 | Internal | 8m | Half-Battered | HD

SKU: ATK-HWA-005-5412

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavaró
Size	130-150(w) x 250(d) x 785(l)
Weight Per Unit	64.57kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	6.88 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-13-15x25xL78.5-8m-HD-inw
Type	Radius Internal
End Style	HD
Profile	130-150x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	8m
Number per 360	64
Slope Angle	-
Slope Gradient	-

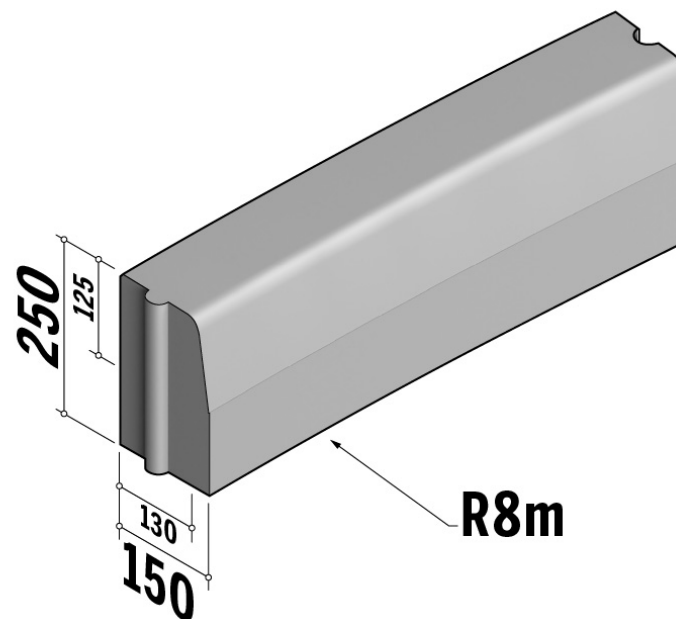

Active Travel Kerbs are available in a range of colours, finishes and materials.

View product online at : <https://hardscape.co.uk/product/Highway-130-150x250-HD-130-150x250-HD-Radius-L-785-Internal-8m-Half-Battered-HD/>

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.