

Civils &amp; Highways / Active Travel Kerbs / Highway / Highway 130-150


# Highway 130-150x250 HD

130-150x250 HD | Return Corner | L-175 | Internal | 90° | Half-Battered | HD

## SPECIFICATION

**Highway 130-150x250 HD | 130-150x250 HD | Return Corner | L-175 | Internal | 90° | Half-Battered | HD**
**SKU: ATK-HWA-005-5415**

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Material                        | Concrete, Kellen                      |
| Finish                          | Standard, Optiflex, Lavaró            |
| Size                            | 130-150(w) x 250(d) x 175(l)          |
| Weight Per Unit                 | 41.13kg                               |
| Manufacturing Standard          | BS EN 1340:2003                       |
| Density                         | 2350 kg/m <sup>3</sup>                |
| GWP (total) kgCO <sub>2</sub> e | 4.38 kgCO <sub>2</sub> e/unit         |
| Dutch Ref.                      | HOEKSTUKKEN-13-15x25xL17.5-90°-HD-inw |
| Type                            | Return Corner Internal                |
| End Style                       | HD                                    |
| Profile                         | 130-150x250                           |
| Position                        | -                                     |
| Face                            | Half-Battered                         |
| Face Angle                      | 81°                                   |
| Return Angle                    | 90°                                   |
| Radius                          | -                                     |
| Number per 360                  | -                                     |
| Slope Angle                     | -                                     |
| Slope Gradient                  | -                                     |

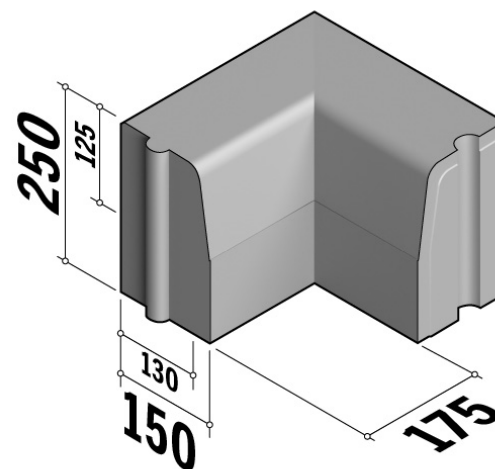

Active Travel Kerbs are available in a range of colours, finishes and materials.