


Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150

Highway 130-150x250 HD

130-150x250 HD | Transition | to 40-150x250 | L-500 | Half-Battered | HDVB

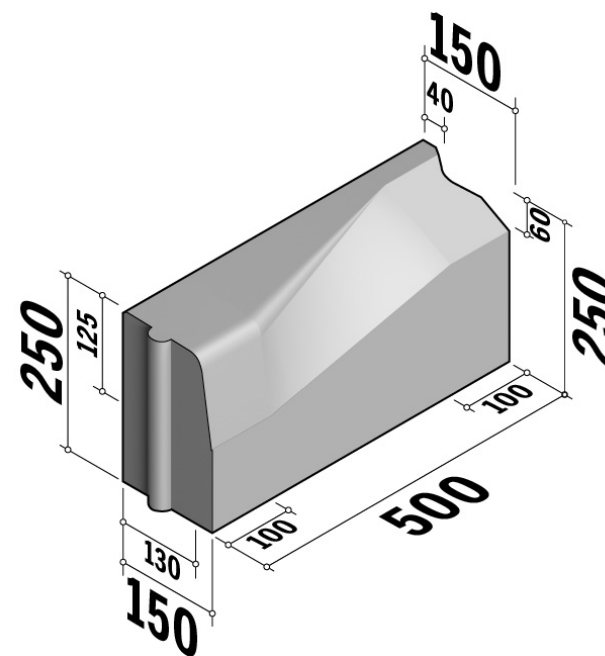

SPECIFICATION

Highway 130-150x250 HD | 130-150x250 HD | Transition | to 40-150x250 | L-500 | Half-Battered | HDVB

SKU: ATK-HWA-005-5501

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò
Size	130-150(w) x 250(d) x 500(l)
Weight Per Unit	41kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	4.37 kgCO ₂ e/unit
Dutch Ref.	VERLOOPBANDEN-13-15x25_4-15x25xL50-HD
Type	Transition
End Style	HDVB
Profile	130-150x250
Position	-
Face	Half-Battered_Splay
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

Active Travel Kerbs are available in a range of colours, finishes and materials.