

Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150


Highway 130-150x250 VB

130-150x250 VB | Radius | L-1000 | Internal | 7m | Half-Battered | VB

SPECIFICATION

Highway 130-150x250 VB | 130-150x250 VB | Radius | L-1000 | Internal | 7m | Half-Battered | VB
SKU: ATK-HWA-006-5558

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavar, Metallo
Size	130-150(w) x 250(d) x 1000(l)
Weight Per Unit	82.25kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	8.76 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-13-15x25xL100-7m-VB-inw
Type	Radius Internal
End Style	VB
Profile	130-150x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	7m
Number per 360	44
Slope Angle	-
Slope Gradient	-

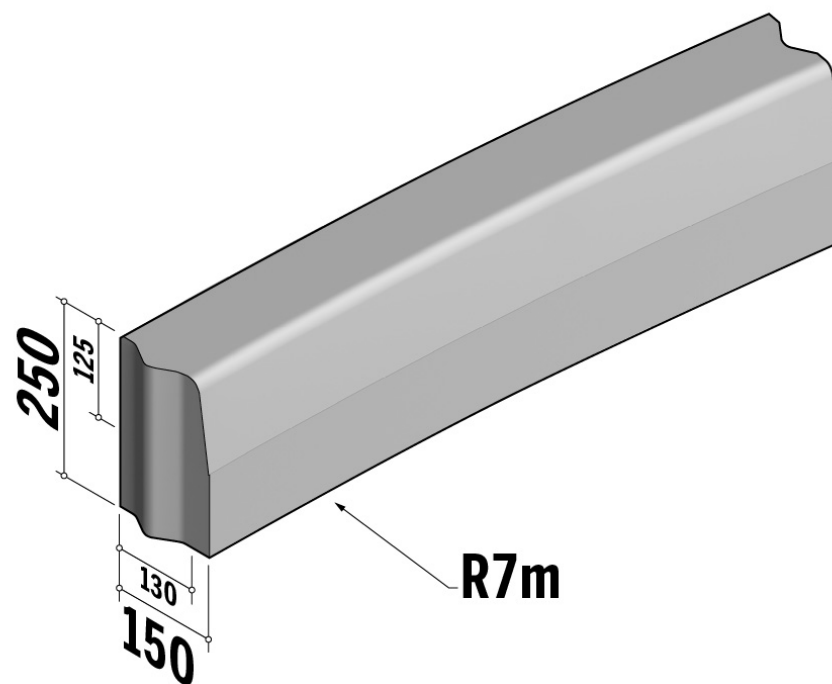

Active Travel Kerbs are available in a range of colours, finishes and materials.