

Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150


Highway 130-150x250 VB

130-150x250 VB | Return Corner | L-250 | Internal | 135° | Half-Battered | VB

SPECIFICATION

Highway 130-150x250 VB | 130-150x250 VB | Return Corner | L-250 | Internal | 135° | Half-Battered | VB
SKU: ATK-HWA-006-5565

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavar, Metallo
Size	130-150(w) x 250(d) x 250(l)
Weight Per Unit	46.06kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	4.91 kgCO ₂ e/unit
Dutch Ref.	HOEKSTUKKEN-13-15x25xL25-135°-VB-inw
Type	Return Corner Internal
End Style	VB
Profile	130-150x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	135°
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

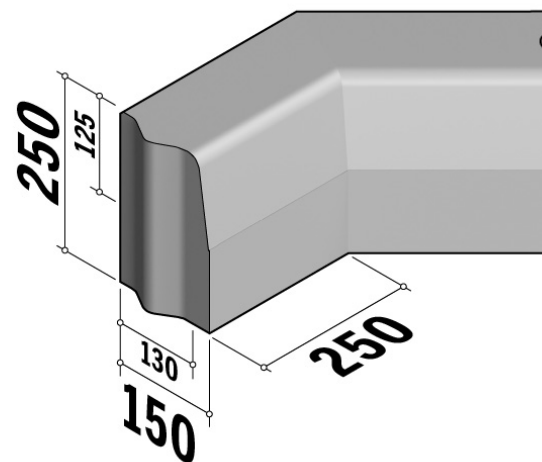

Active Travel Kerbs are available in a range of colours, finishes and materials.