


Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150

Highway 130-150x250 VB

130-150x250 VB | Return 3-way | L-500 | 90° | Right | Half-Battered | VBVB

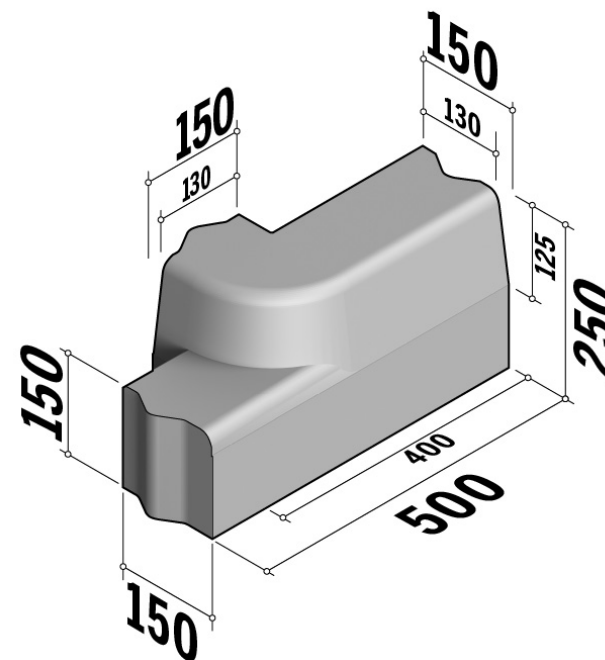

SPECIFICATION

Highway 130-150x250 VB | 130-150x250 VB | Return 3-way | L-500 | 90° | Right | Half-Battered | VBVB

SKU: ATK-HWA-006-5569

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavaró
Size	130-150(w) x 250(d) x 500(l)
Weight Per Unit	80kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	8.52 kgCO ₂ e/unit
Dutch Ref.	DRIEWEGBAND-HOEK-13-15x25_15x15xL50-90°-VB-RECHTS
Type	Return 3-way
End Style	VBVB
Profile	130-150x250
Position	Right
Face	Half-Battered
Face Angle	81°
Return Angle	90°
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

Active Travel Kerbs are available in a range of colours, finishes and materials.