

Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150

Highway 130-150x250 VB


130-150x250 VB | Return Radial | to 380-400x250 | Internal | 90° | 0.3m | Half-Battered | VB

SPECIFICATION

Highway 130-150x250 VB | 130-150x250 VB | Return Radial | to 380-400x250 | Internal | 90° | 0.3m | Half-Battered | VB

SKU: ATK-HWA-006-5579

Material	Concrete
Finish	Standard Wet Cast
Size	130-150(w) x 250(d)
Weight Per Unit	kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	0 kgCO ₂ e/unit
Dutch Ref.	HOEKBLOKKEN-13-15x25_38-40x25-0.3m-90°-VB-inw
Type	Return Radial Internal
End Style	VB
Profile	130-150x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	90°
Radius	0.3m
Number per 360	-
Slope Angle	-
Slope Gradient	-

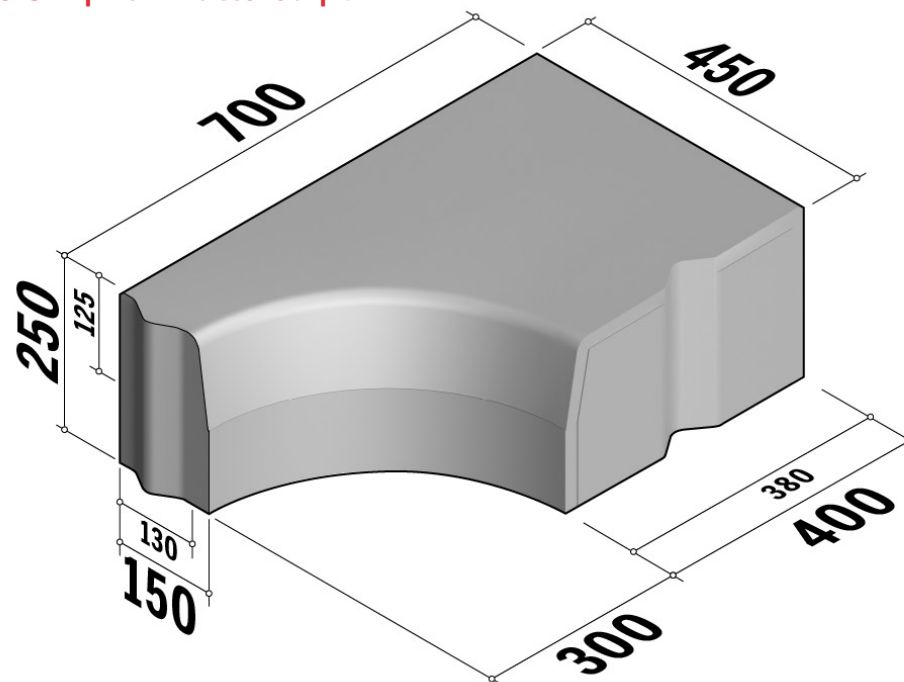

Active Travel Kerbs are available in a range of colours, finishes and materials.