

Civils & Highways / Active Travel Kerbs / Highway / Highway 130-150


Highway 130-150x400 VB

130-150x400 VB | Return Corner | L-400 | External | 90° | Half-Battered | VB

SPECIFICATION

Highway 130-150x400 VB | 130-150x400 VB | Return Corner | L-400 | External | 90° | Half-Battered | VB
SKU: ATK-HWA-008-5600

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavar, Metallo
Size	130-150(w) x 400(d) x 400(l)
Weight Per Unit	85.54kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	9.11 kgCO ₂ e/unit
Dutch Ref.	HOEKSTUKKEN-13-15x40xL40-90°-VB
Type	Return Corner External
End Style	VB
Profile	130-150x400
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	90°
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

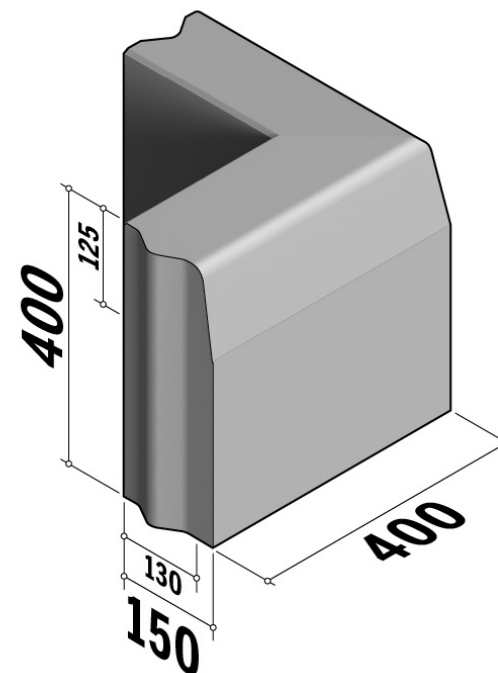

Active Travel Kerbs are available in a range of colours, finishes and materials.