

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb 130-150


450x160x500 HD | L-500 | Left | Half-Battered | HDSQ

SPECIFICATION

Entry Kerb 130-150 | 450x160 | L-500 | Left | Half-Battered | HDSQ

SKU: ATK-HWA-009-5602

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò
Size	450(w) x 160(d) x 500(l)
Weight Per Unit	68.4kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	7.29 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-45x16xL50-HD-LINKS
Type	-
End Style	HDSQ
Profile	450x160
Position	Left
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	15°
Slope Gradient	1:3.8

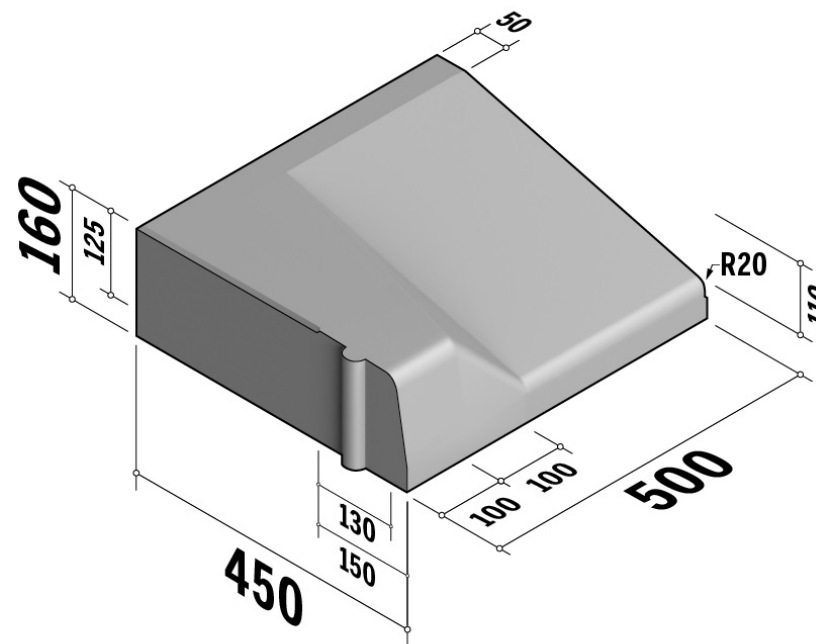

Active Travel Kerbs are available in a range of colours, finishes and materials.