

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb Universal


450x200x450 SQ | L-450 | Right | Half-Battered | SQ

SPECIFICATION

Entry Kerb Universal | 450x200 | L-450 | Right | Half-Battered | SQ

SKU: ATK-HWA-009-5613

Material	Concrete, Kellen
Finish	Standard, Lavarò
Size	450(w) x 200(d) x 450(l)
Weight Per Unit	89.7kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	9.56 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-45x20xL45-VL-RECHTS
Type	-
End Style	SQ
Profile	450x200
Position	Right
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	14°
Slope Gradient	1:4

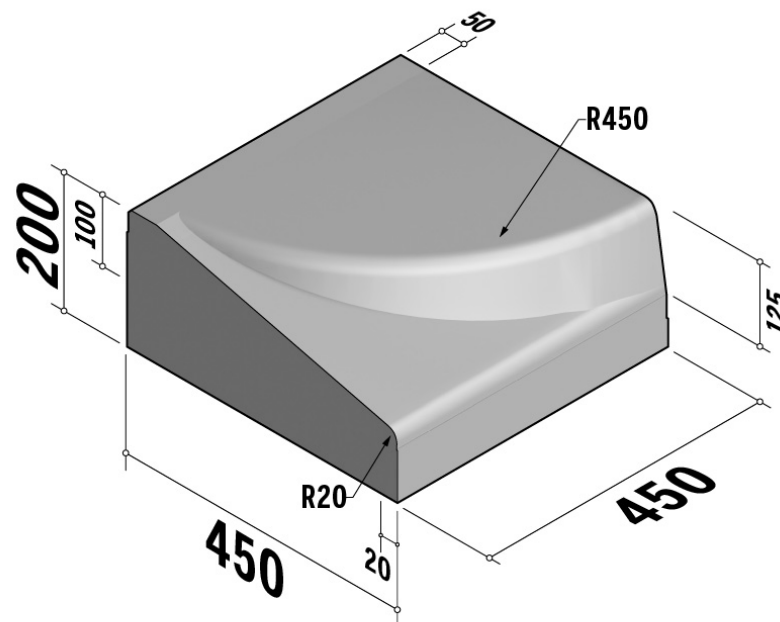

Active Travel Kerbs are available in a range of colours, finishes and materials.