

Civils & Highways / Active Travel Kerbs / Entry Kerb


Entry Kerb 130-150

450x200x500 VB | L-500 | Right | Half-Battered | VB

SPECIFICATION

Entry Kerb 130-150 | 450x200 | L-500 | Right | Half-Battered | VB
SKU: ATK-HWA-009-5616

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavar, Metallo
Size	450(w) x 200(d) x 500(l)
Weight Per Unit	96.15kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	10.25 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-13/15-45x20xL50-VB-RECHTS
Type	-
End Style	VB
Profile	450x200
Position	Right
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	13°
Slope Gradient	1:4.2

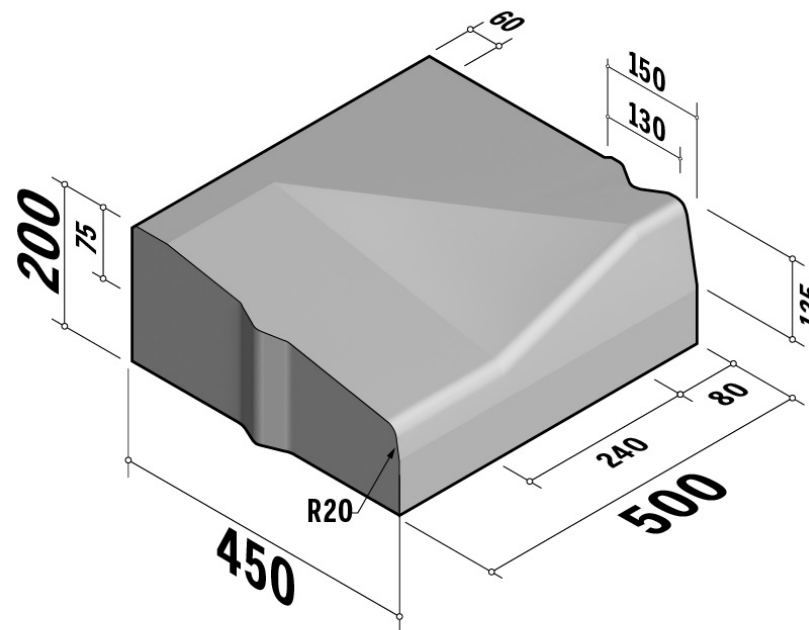

Active Travel Kerbs are available in a range of colours, finishes and materials.