

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb Universal


600x160x500 SQ | L-500 | Right | Half-Battered | SQ

SPECIFICATION

Entry Kerb Universal | 600x160 | L-500 | Right | Half-Battered | SQ

SKU: ATK-HWA-009-5622

Material	Concrete, Kellen
Finish	Standard, Lavar, Metallo
Size	600(w) x 160(d) x 500(l)
Weight Per Unit	91.42kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	9.74 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-60x16xL50-VL-RECHTS
Type	-
End Style	SQ
Profile	600x160
Position	Right
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	10°
Slope Gradient	1:5.8

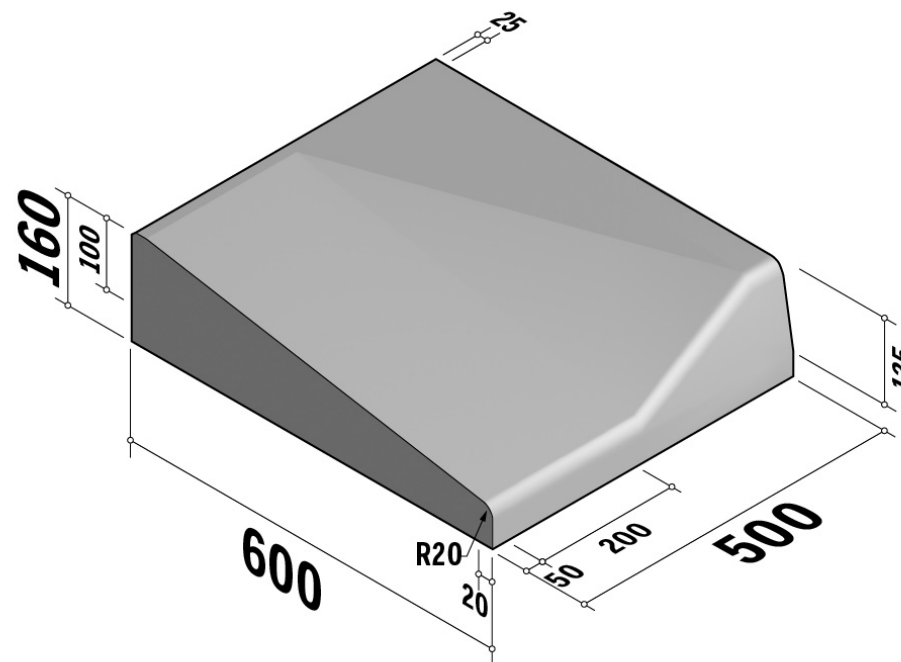

Active Travel Kerbs are available in a range of colours, finishes and materials.