

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb 130-150


750x180x500 SQ | Radius | L-470 | Internal | 6m | Slope | SQ

SPECIFICATION

Entry Kerb 130-150 | 750x180 | Radius | L-470 | Internal | 6m | Slope | SQ

SKU: ATK-HWA-009-5633

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavar, Metallo
Size	750(w) x 180(d) x 470(l)
Weight Per Unit	116.33kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	12.4 kgCO ₂ e/unit
Dutch Ref.	INRITBOCHTBANDEN-75x18xL47-6m-VL-inw
Type	Radius Internal
End Style	SQ
Profile	750x180
Position	-
Face	Slope
Face Angle	-
Return Angle	-
Radius	6m
Number per 360	80
Slope Angle	8°
Slope Gradient	1:7.2

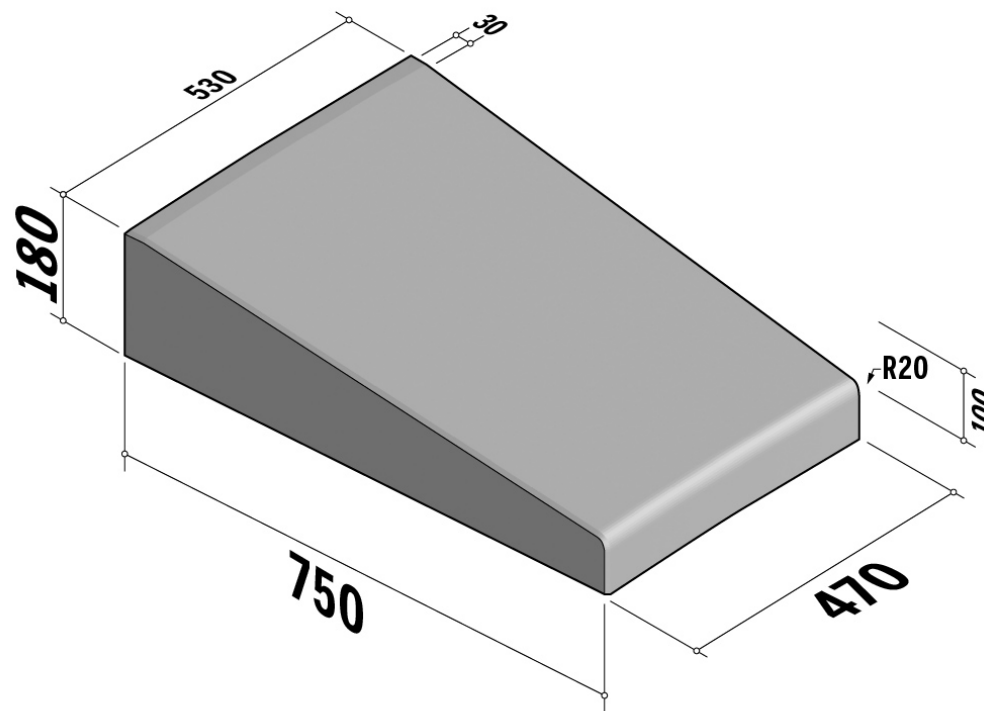

Active Travel Kerbs are available in a range of colours, finishes and materials.