

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb Universal


750x250x250 SQ | L-250 | Left | Half-Battered | SQ

SPECIFICATION

Entry Kerb Universal | 750x250 | L-250 | Left | Half-Battered | SQ

SKU: ATK-HWA-009-6935

Material	Concrete, Kellen
Finish	Standard, Lavarò
Size	750(w) x 250(d) x 250(l)
Weight Per Unit	107kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	11.4 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-75x25xL25-VL-LINKS
Type	-
End Style	SQ
Profile	750x250
Position	Left
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

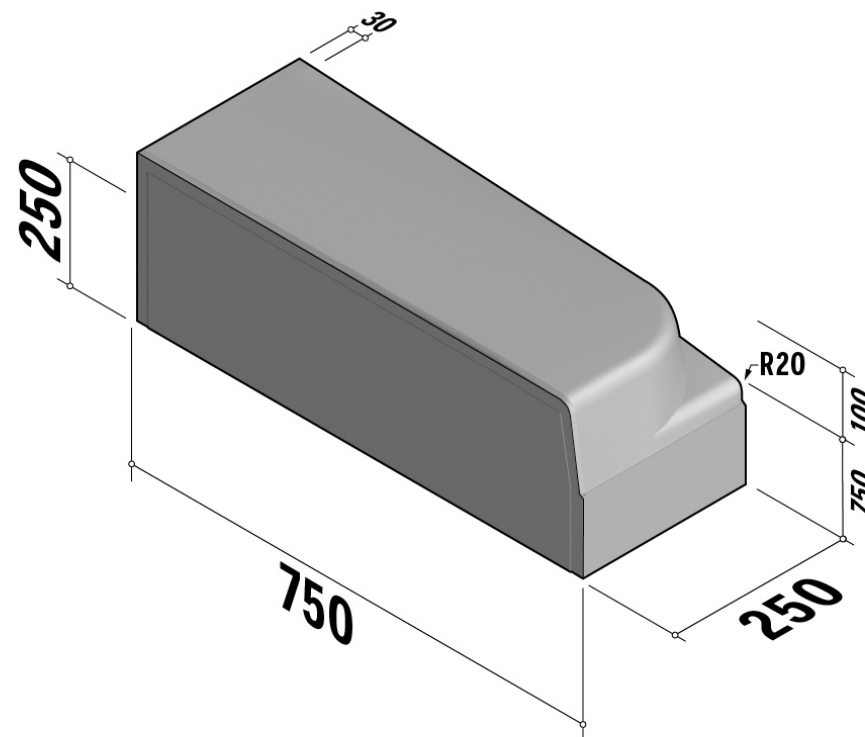

Active Travel Kerbs are available in a range of colours, finishes and materials.