

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200


Highway 180-200x120 VB

180-200x120 VB | Radius | L-590 | External | 0.75m | Half-Battered | VB

SPECIFICATION

Highway 180-200x120 VB | 180-200x120 VB | Radius | L-590 | External | 0.75m | Half-Battered | VB
SKU: ATK-HWC-002-5660

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavarò
Size	180-200(w) x 120(d) x 590(l)
Weight Per Unit	26.3kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	2.8 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-18-20x12xL59-0.75m-VB
Type	Radius External
End Style	VB
Profile	180-200x120
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	0.75m
Number per 360	8
Slope Angle	-
Slope Gradient	-

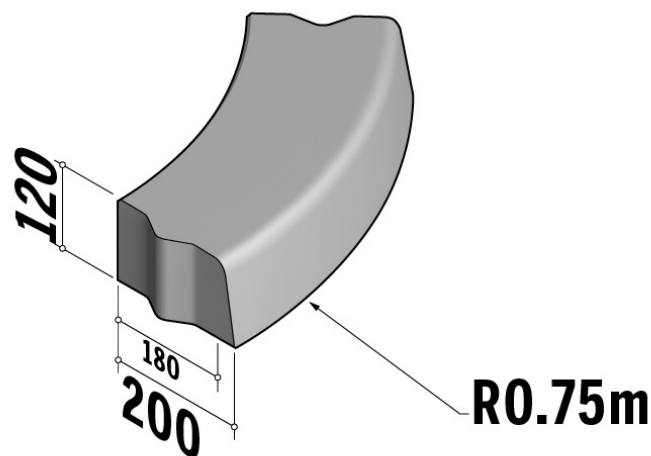

Active Travel Kerbs are available in a range of colours, finishes and materials.