

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200


Highway 180-200x160 HD

180-200x160 HD | Radius | L-785 | Internal | 4m | Half-Battered | HD

SPECIFICATION

Highway 180-200x160 HD | 180-200x160 HD | Radius | L-785 | Internal | 4m | Half-Battered | HD
SKU: ATK-HWC-003-5685

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavaró
Size	180-200(w) x 160(d) x 785(l)
Weight Per Unit	56.08kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	5.98 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-18-20x16xL78.5-4m-HD-inw
Type	Radius Internal
End Style	HD
Profile	180-200x160
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	4m
Number per 360	32
Slope Angle	-
Slope Gradient	-

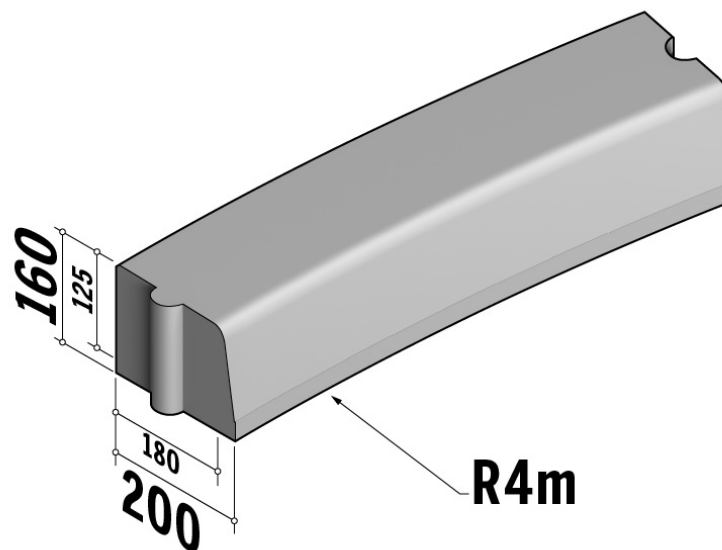

Active Travel Kerbs are available in a range of colours, finishes and materials.

 View product online at : <https://hardscape.co.uk/product/Highway-180-200x160-HD-180-200x160-HD-Radius-L-785-Internal-4m-Half-Battered-HD/>

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.