

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200


Highway 180-200x160 VB

180-200x160 VB | Radius | L-785 | External | 0.5m | Half-Battered | VB

SPECIFICATION

Highway 180-200x160 VB | 180-200x160 VB | Radius | L-785 | External | 0.5m | Half-Battered | VB
SKU: ATK-HWC-004-5709

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavarò
Size	180-200(w) x 160(d) x 785(l)
Weight Per Unit	45kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	4.79 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-18-20x16xL78.5-0.5m-VB
Type	Radius External
End Style	VB
Profile	180-200x160
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	0.5m
Number per 360	4
Slope Angle	-
Slope Gradient	-

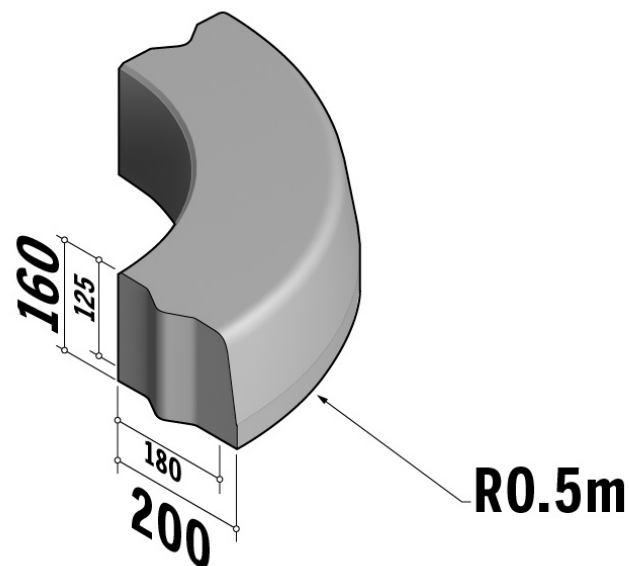

Active Travel Kerbs are available in a range of colours, finishes and materials.