

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200


Highway 180-200x250 HD

180-200x250 HD | Radius | L-785 | External | 10m | Half-Battered | HD

SPECIFICATION

Highway 180-200x250 HD | 180-200x250 HD | Radius | L-785 | External | 10m |
 Half-Battered | HD
 SKU: ATK-HWC-007-5868

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavarro, Metallo
Size	180-200(w) x 250(d) x 785(l)
Weight Per Unit	87.63kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	9.34 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-18-20x25xL78.5-10m-HD
Type	Radius External
End Style	HD
Profile	180-200x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	10m
Number per 360	80
Slope Angle	-
Slope Gradient	-

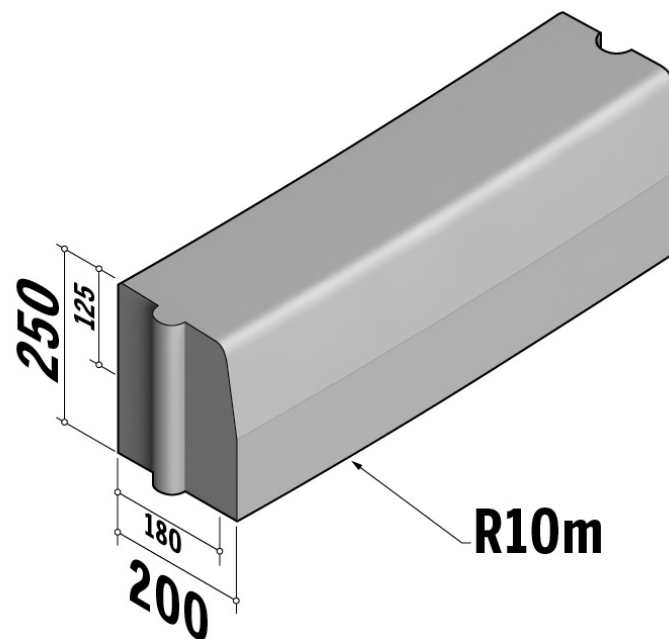

Active Travel Kerbs are available in a range of colours, finishes and materials.