

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200

Highway 180-200x250 HD


180-200x250 HD | Radius | L-470 | Internal | 0.3m | Half-Battered | HD

SPECIFICATION

Highway 180-200x250 HD | 180-200x250 HD | Radius | L-470 | Internal | 0.3m | Half-Battered | HD

SKU: ATK-HWC-007-5871

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavar, Metallo
Size	180-200(w) x 250(d) x 470(l)
Weight Per Unit	71.5kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	7.62 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-18-20x25xL47-0.3m-HD-inw
Type	Radius Internal
End Style	HD
Profile	180-200x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	0.3m
Number per 360	4
Slope Angle	-
Slope Gradient	-

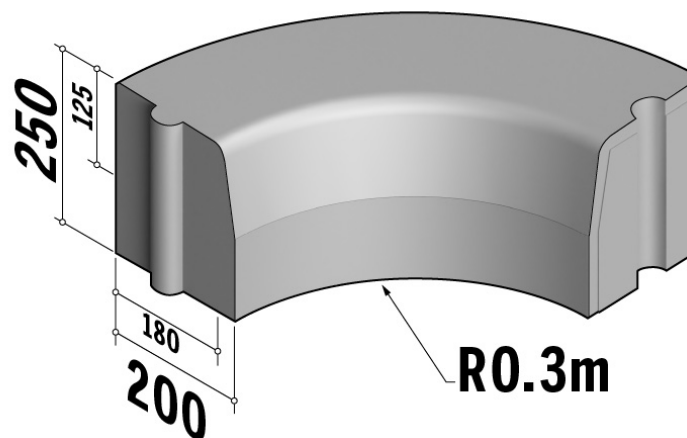

Active Travel Kerbs are available in a range of colours, finishes and materials.