

Civils &amp; Highways / Active Travel Kerbs / Highway / Highway 180-200


# Highway 180-200x250 HD

180-200x250 HD | Return Corner | L-150 | Internal | 90° | Half-Battered | HD

## SPECIFICATION

**Highway 180-200x250 HD | 180-200x250 HD | Return Corner | L-150 | Internal | 90° | Half-Battered | HD**
**SKU: ATK-HWC-007-5893**

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Material                        | Concrete, Kellen                    |
| Finish                          | Standard, Lavar, Metallo            |
| Size                            | 180-200(w) x 250(d) x 150(l)        |
| Weight Per Unit                 | 55.82kg                             |
| Manufacturing Standard          | BS EN 1340:2003                     |
| Density                         | 2350 kg/m <sup>3</sup>              |
| GWP (total) kgCO <sub>2</sub> e | 5.95 kgCO <sub>2</sub> e/unit       |
| Dutch Ref.                      | HOEKSTUKKEN-18-20x25xL15-90°-HD-inw |
| Type                            | Return Corner Internal              |
| End Style                       | HD                                  |
| Profile                         | 180-200x250                         |
| Position                        | -                                   |
| Face                            | Half-Battered                       |
| Face Angle                      | 81°                                 |
| Return Angle                    | 90°                                 |
| Radius                          | -                                   |
| Number per 360                  | -                                   |
| Slope Angle                     | -                                   |
| Slope Gradient                  | -                                   |

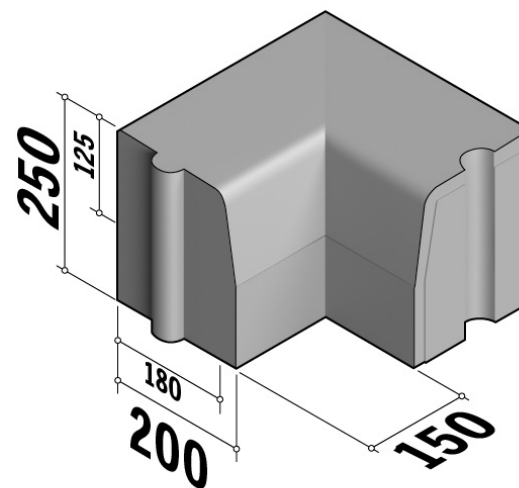

Active Travel Kerbs are available in a range of colours, finishes and materials.