

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200

Highway 180-200x250 VB


180-200x250 VB | Radius | L-390 | Internal | 0.5m | Half-Battered | VB

SPECIFICATION

Highway 180-200x250 VB | 180-200x250 VB | Radius | L-390 | Internal | 0.5m | Half-Battered | VB

SKU: ATK-HWC-008-6005

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavar, Metallo
Size	180-200(w) x 250(d) x 390(l)
Weight Per Unit	54.2kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	5.78 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-18-20x25xL39-0.5m-VB-inw
Type	Radius Internal
End Style	VB
Profile	180-200x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	0.5m
Number per 360	8
Slope Angle	-
Slope Gradient	-

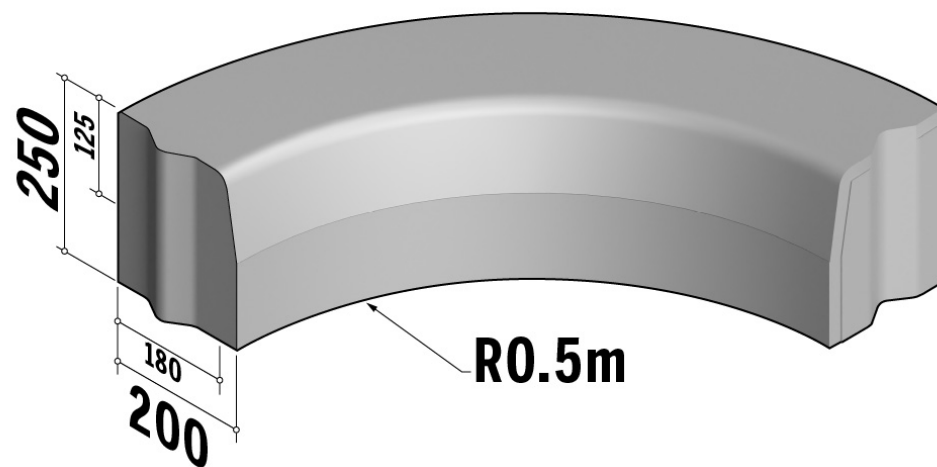

Active Travel Kerbs are available in a range of colours, finishes and materials.