

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200

Highway 180-200x250 VB


180-200x250 VB | Radius | L-940 | Internal | 6m | Half-Battered | VB

SPECIFICATION

Highway 180-200x250 VB | 180-200x250 VB | Radius | L-940 | Internal | 6m | Half-Battered | VB

SKU: ATK-HWC-008-6008

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavar, Metallo
Size	180-200(w) x 250(d) x 940(l)
Weight Per Unit	105.16kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	11.21 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-18-20x25xL94-6m-VB-inw
Type	Radius Internal
End Style	VB
Profile	180-200x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	6m
Number per 360	40
Slope Angle	-
Slope Gradient	-

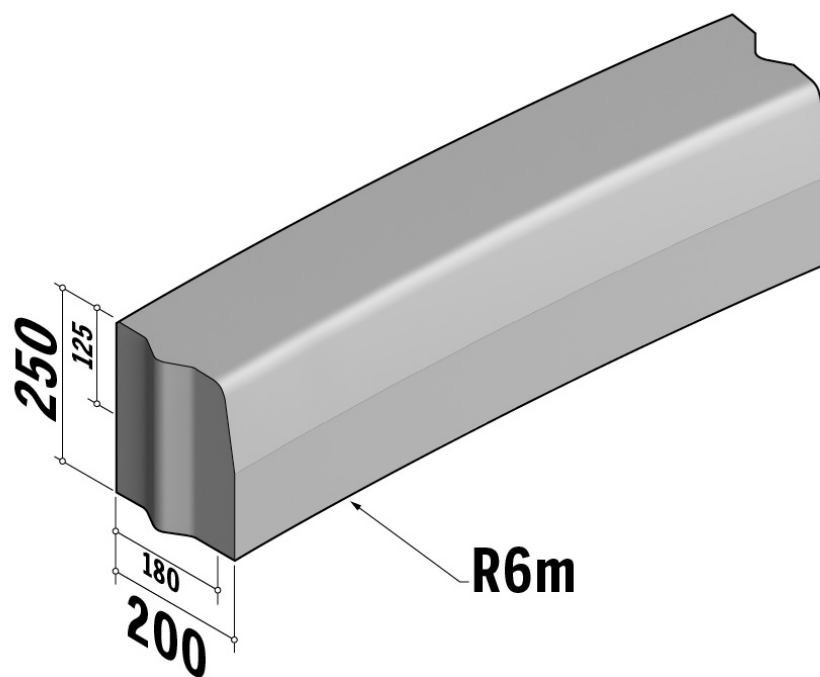

Active Travel Kerbs are available in a range of colours, finishes and materials.

 View product online at : <https://hardscape.co.uk/product/Highway-180-200x250-VB-180-200x250-VB-Radius-L-940-Internal-6m-Half-Battered-VB/>

Specification & technical data is indicative and subject to change. Images are for illustrative purposes only, details may vary. Some data may vary according to colour / material / finish variation.