

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200


Highway 180-200x250 VB

180-200x250 VB | Return Corner | L-400 | External | 135° | Half-Battered | VB

SPECIFICATION

Highway 180-200x250 VB | 180-200x250 VB | Return Corner | L-400 | External | 135° | Half-Battered | VB
SKU: ATK-HWC-008-6031

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavano, Metallo
Size	180-200(w) x 250(d) x 400(l)
Weight Per Unit	80.37kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	8.56 kgCO ₂ e/unit
Dutch Ref.	HOEKSTUKKEN-18-20x25xL40-135°-VB
Type	Return Corner External
End Style	VB
Profile	180-200x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	135°
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

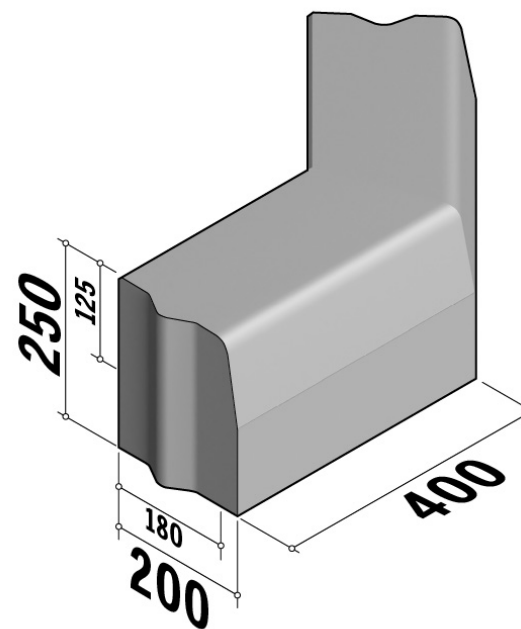

Active Travel Kerbs are available in a range of colours, finishes and materials.