

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200


Highway 180-200x250 VB

180-200x250 VB | Return Radial | External | 90° | 0.5m | Half-Battered | VB

SPECIFICATION

Highway 180-200x250 VB | 180-200x250 VB | Return Radial | External | 90° | 0.5m | Half-Battered | VB
SKU: ATK-HWC-008-6034

Material	Concrete, Kellen
Finish	Standard, Optiflex, Lavarò, Metallo
Size	180-200(w) x 250(d)
Weight Per Unit	113.04kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m³
GWP (total) kgCO2e	12.04 kgCO2e/unit
Dutch Ref.	HOEKBLOKKEN-18-20x25-0.5m-90°-VB
Type	Return Radial External
End Style	VB
Profile	180-200x250
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	90°
Radius	0.5m
Number per 360	-
Slope Angle	-
Slope Gradient	-

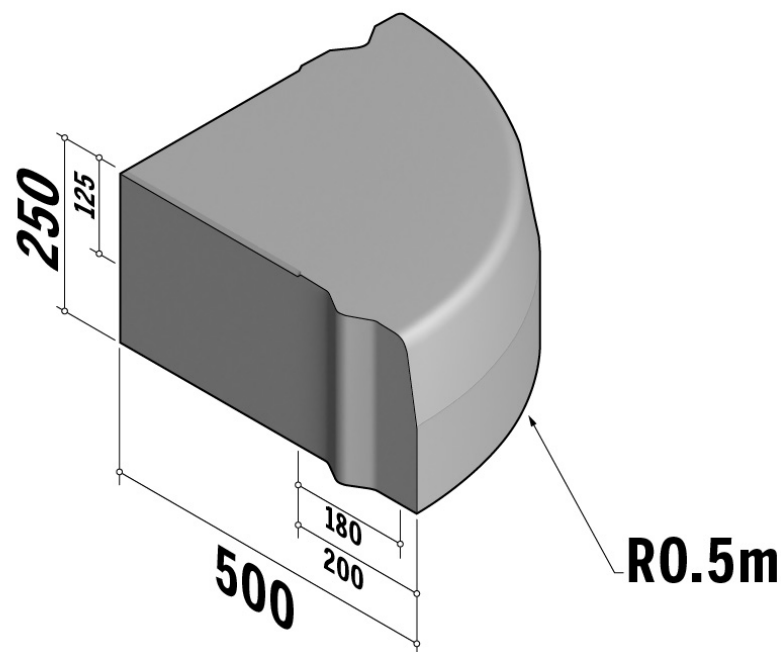

Active Travel Kerbs are available in a range of colours, finishes and materials.