

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200


Highway 180-200x250 VB

180-200x250 VB | Drop Transition | to 200x130 | L-1000 | Left | Half-Battered | VB

SPECIFICATION

Highway 180-200x250 VB | 180-200x250 VB | Drop Transition | to 200x130 | L-1000 | Left | Half-Battered | VB
SKU: ATK-HWC-008-6044

Material	Concrete, Kellen
Finish	Standard Wet Cast, Optiflex, Lavar, Metallo
Size	180-200(w) x 250(d) x 1000(l)
Weight Per Unit	87.3kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	9.3 kgCO ₂ e/unit
Dutch Ref.	INRITVERLOOPBANDEN-18-20x25_20x13xL100-VB-LINKS
Type	Drop Transition
End Style	VB
Profile	180-200x250
Position	Left
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

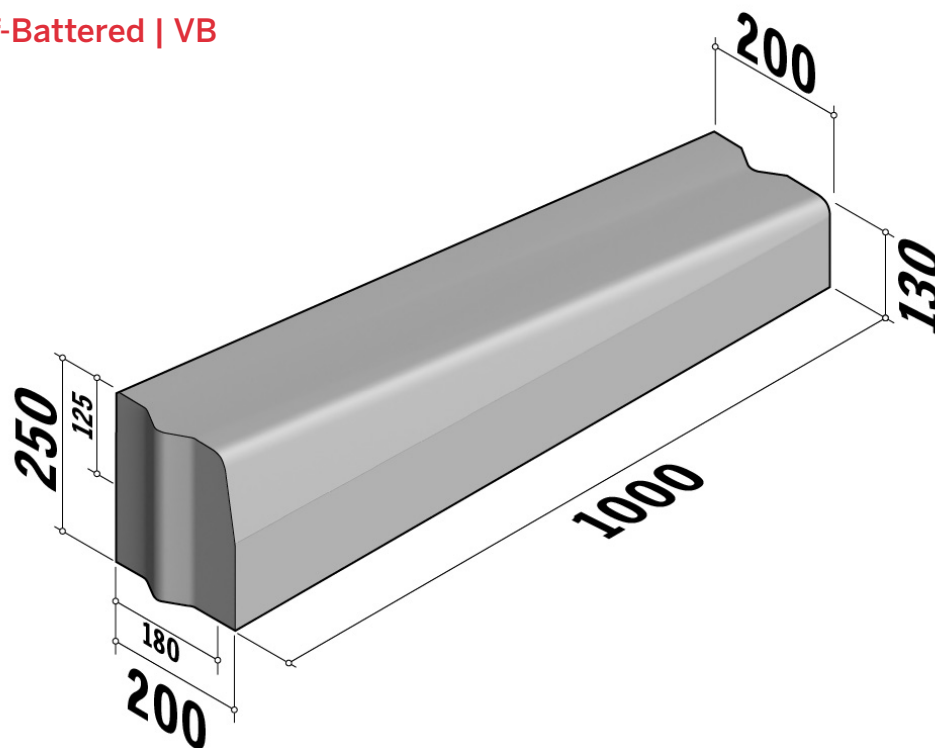

Active Travel Kerbs are available in a range of colours, finishes and materials.