

Civils & Highways / Active Travel Kerbs / Highway / Highway 180-200


Highway 180-200x250 VB

180-200x250 VB | Transition | to 170-200x400 | L-1000 | Transition | Half-Battered | VBVB

SPECIFICATION

Highway 180-200x250 VB | 180-200x345 VB | Transition | to 170-200x400 | L-1000 | Transition | Half-Battered | VBVB
SKU: ATK-HWC-008-6934

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò, Metallo
Size	180-200(w) x 345(d) x 1000(l)
Weight Per Unit	168.9kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	18 kgCO ₂ e/unit
Dutch Ref.	VERLOOPBANDEN-18-20x34.5_17-20x40xL100-VBVB
Type	Transition Transition
End Style	VBVB
Profile	180-200x345
Position	-
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

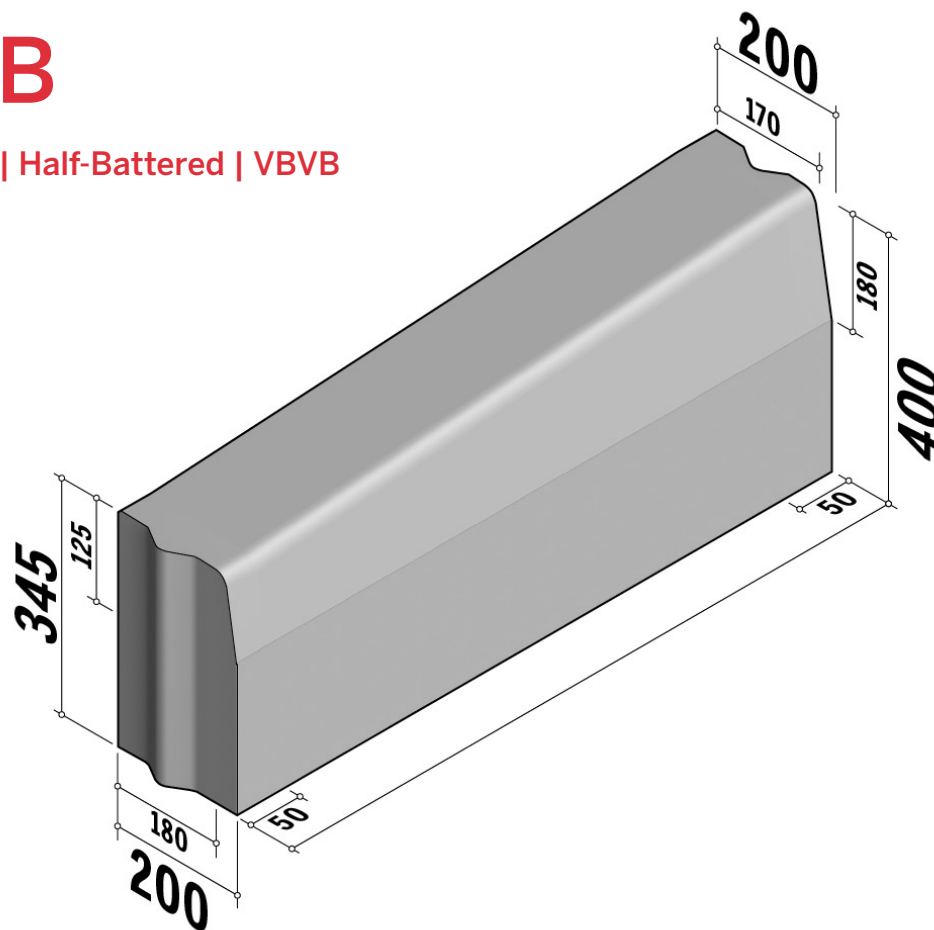

Active Travel Kerbs are available in a range of colours, finishes and materials.