

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb 180-200


500x160x500 HD | L-500 | Left | Half-Battered | HDSQ

SPECIFICATION

Entry Kerb 180-200 | 500x160 | L-500 | Left | Half-Battered | HDSQ

SKU: ATK-HWC-009-6055

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò
Size	500(w) x 160(d) x 500(l)
Weight Per Unit	77.31kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	8.24 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-50x16xL50-HD-LINKS
Type	-
End Style	HDSQ
Profile	500x160
Position	Left
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	15°
Slope Gradient	1:3.6

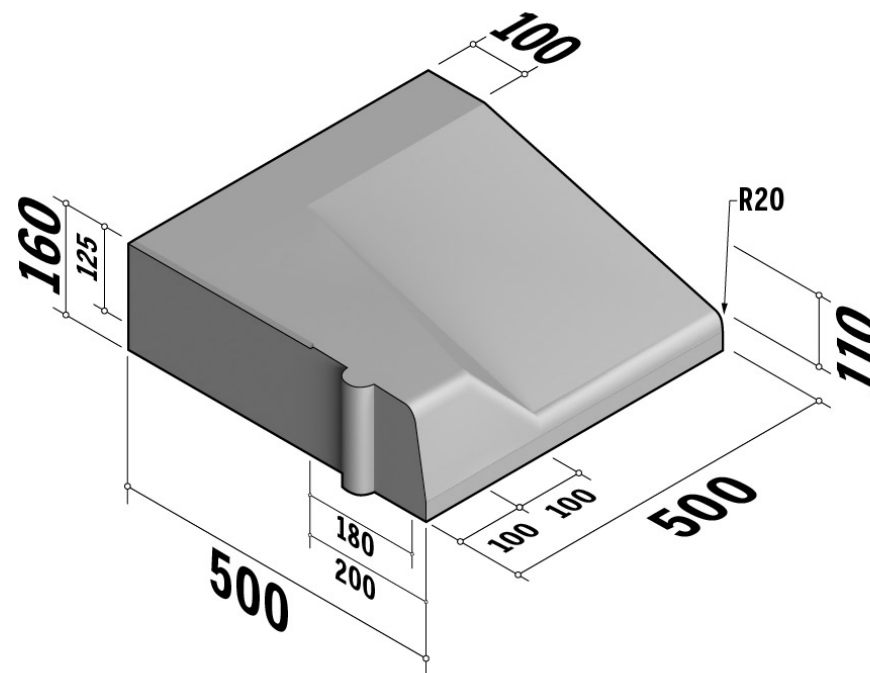

Active Travel Kerbs are available in a range of colours, finishes and materials.