

Civils &amp; Highways / Active Travel Kerbs / Entry Kerb


# Entry Kerb 180-200

500x160x500 HD | L-500 | Middle | Slope | SQ

## SPECIFICATION

**Entry Kerb 180-200 | 500x160 | L-500 | Middle | Slope | SQ**
**SKU: ATK-HWC-009-6056**

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Material                        | Concrete, Kellen                    |
| Finish                          | Standard Wet Cast, Lavarò           |
| Size                            | 500(w) x 160(d) x 500(l)            |
| Weight Per Unit                 | 70.5kg                              |
| Manufacturing Standard          | BS EN 1340:2003                     |
| Density                         | 2350 kg/m <sup>3</sup>              |
| GWP (total) kgCO <sub>2</sub> e | 7.51 kgCO <sub>2</sub> e/unit       |
| Dutch Ref.                      | INRITBANDEN-50x16xL50-VL(HD)-MIDDEN |
| Type                            | -                                   |
| End Style                       | SQ                                  |
| Profile                         | 500x160                             |
| Position                        | Middle                              |
| Face                            | Slope                               |
| Face Angle                      | -                                   |
| Return Angle                    | -                                   |
| Radius                          | -                                   |
| Number per 360                  | -                                   |
| Slope Angle                     | 15°                                 |
| Slope Gradient                  | 1:3.6                               |

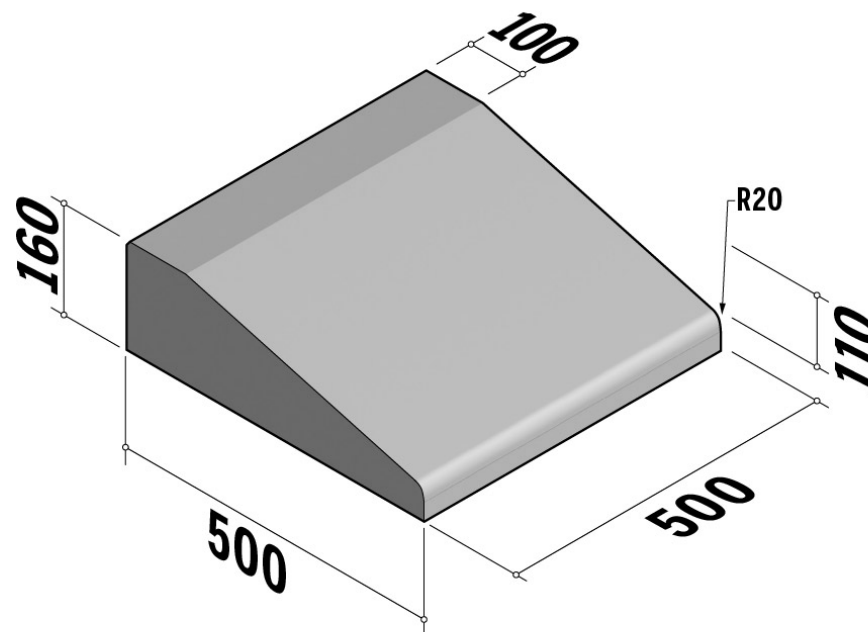

Active Travel Kerbs are available in a range of colours, finishes and materials.