

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb Universal


650x200x300 SQ | L-300 | Right | Half-Battered | SQ

SPECIFICATION

Entry Kerb Universal | 650x200 | L-300 | Right | Half-Battered | SQ

SKU: ATK-HWC-009-6069

Material	Concrete, Kellen
Finish	Standard, Lavaró
Size	650(w) x 200(d) x 300(l)
Weight Per Unit	80.17kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	8.54 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-65x20xL30-VL-RECHTS
Type	-
End Style	SQ
Profile	650x200
Position	Right
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	9°
Slope Gradient	1:6

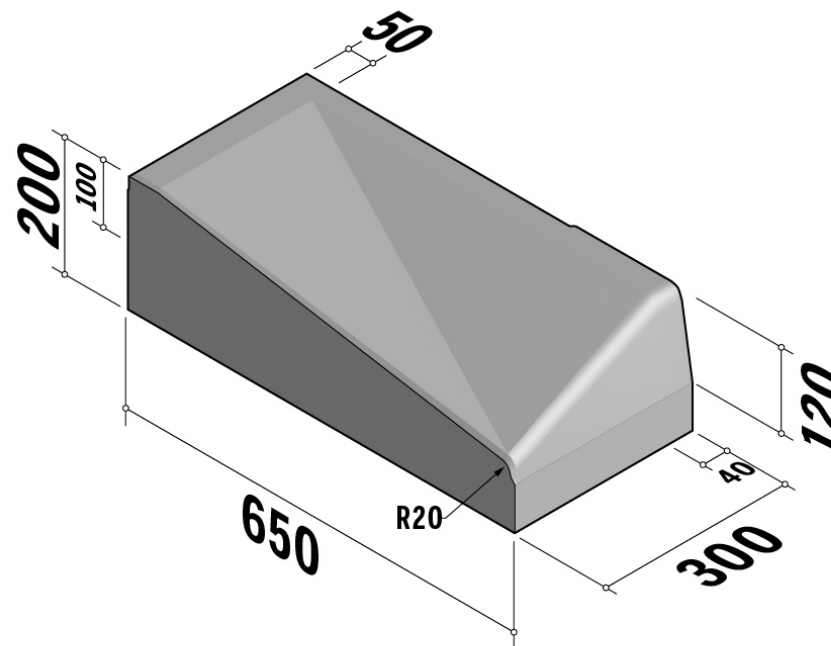

Active Travel Kerbs are available in a range of colours, finishes and materials.