

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb 180-200


800x180x500 VB | L-500 | Left | Half-Battered | VBSQ

SPECIFICATION

Entry Kerb 180-200 | 800x180 | L-500 | Left | Half-Battered | VBSQ

SKU: ATK-HWC-009-6076

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavar, Metallo
Size	800(w) x 180(d) x 500(l)
Weight Per Unit	135.6kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	14.45 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-80x18xL50-VB.VL-LINKS
Type	-
End Style	VBSQ
Profile	800x180
Position	Left
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	7°
Slope Gradient	1:7.7

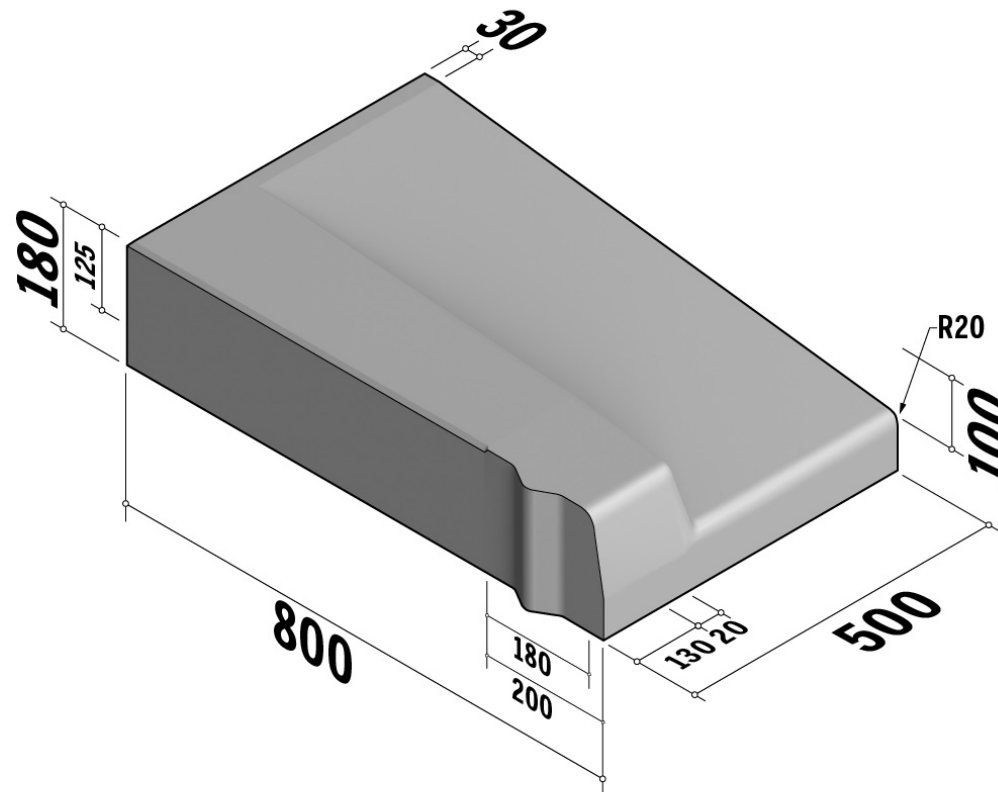

Active Travel Kerbs are available in a range of colours, finishes and materials.