

Civils & Highways / Active Travel Kerbs / Entry Kerb

Entry Kerb 110-220


500x200x750 VB | L-750 | Left | Splay | VBSQ

SPECIFICATION

Entry Kerb 110-220 | 500x200 | L-750 | Left | Splay | VBSQ

SKU: ATK-HWG-005-6272

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò
Size	500(w) x 200(d) x 750(l)
Weight Per Unit	148kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	15.77 kgCO ₂ e/unit
Dutch Ref.	INRITBANDEN-50x20xL75-VBVL-LINKS
Type	-
End Style	VBSQ
Profile	500x200
Position	Left
Face	Splay
Face Angle	48°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	12°
Slope Gradient	1:4.6

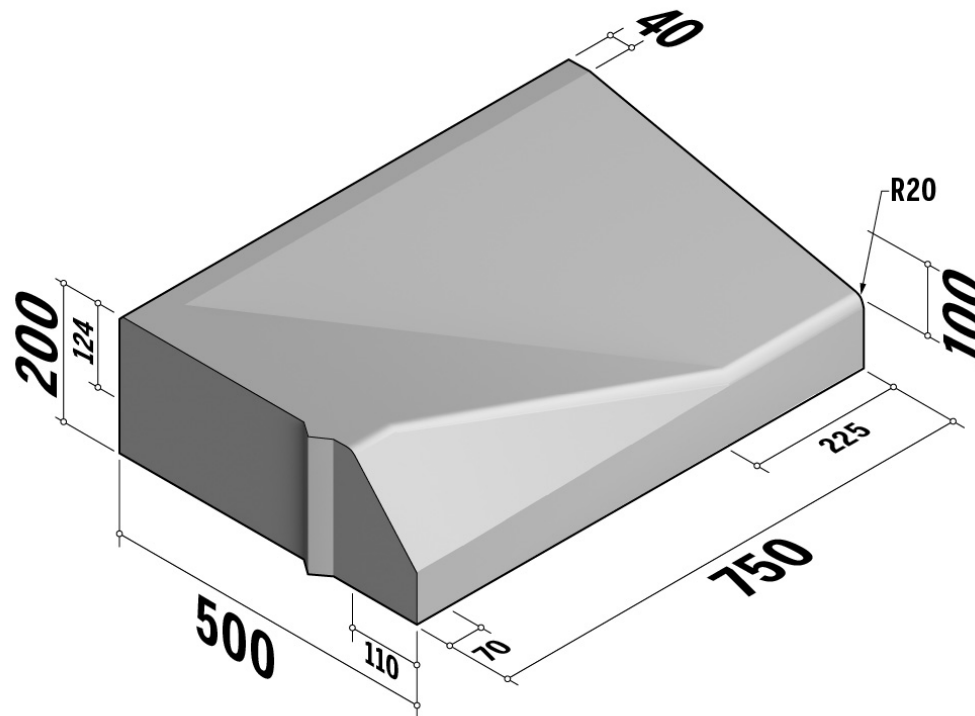

Active Travel Kerbs are available in a range of colours, finishes and materials.