

Civils & Highways / Active Travel Kerbs / Highway / Highway 230-250

Highway 230-250x200


230-250x250 | Drop Transition | to 250x150 | L-1000 | Left | Half-Battered | VB

SPECIFICATION

Highway 230-250x200 | 230-250x250 | Drop Transition | to 250x150 | L-1000 | Left | Half-Battered | VB

SKU: ATK-HWM-001-6315

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò
Size	230-250(w) x 250(d) x 1000(l)
Weight Per Unit	113.4kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	12.08 kgCO ₂ e/unit
Dutch Ref.	INRITVERLOOPBANDEN-23-25x25_25x15xL100-VB-LINKS
Type	Drop Transition
End Style	VB
Profile	230-250x250
Position	Left
Face	Half-Battered
Face Angle	81°
Return Angle	-
Radius	-
Number per 360	-
Slope Angle	-
Slope Gradient	-

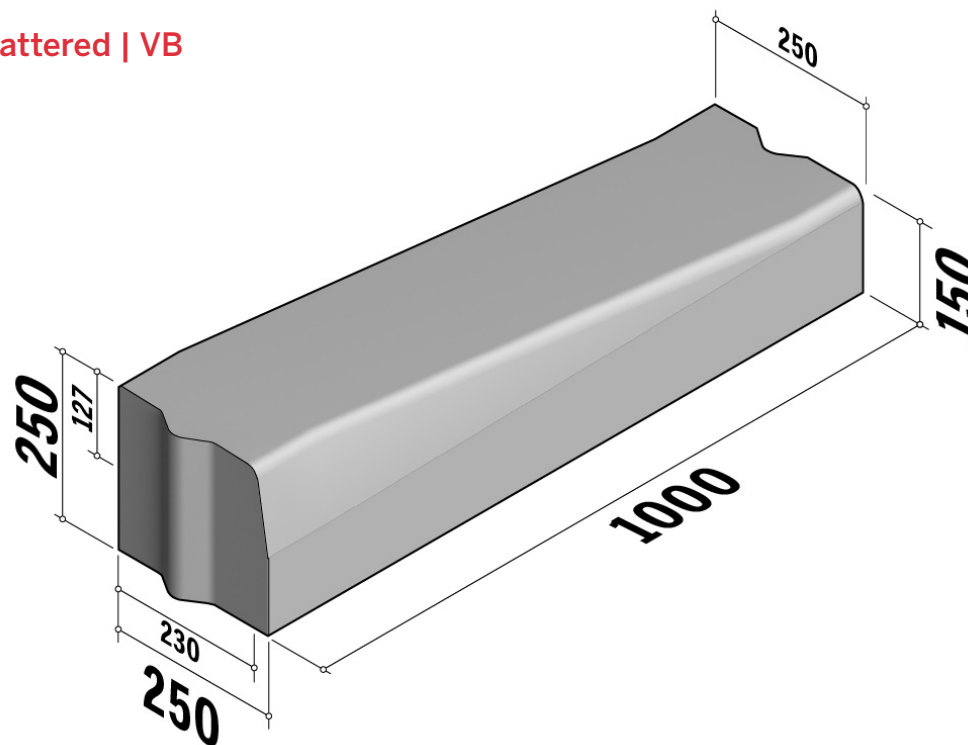

Active Travel Kerbs are available in a range of colours, finishes and materials.