

Civils & Highways / Active Travel Kerbs / Highway / Highway 260-300

Highway 260-300x500


260-300x500 | Radius | L-785 | External | 0.5m | Half-Battered | VB

SPECIFICATION

Highway 260-300x500 | 260-300x500 | Radius | L-785 | External | 0.5m | Half-Battered | VB

SKU: ATK-HWN-003-6333

Material	Concrete, Kellen
Finish	Standard Wet Cast, Lavarò
Size	260-300(w) x 500(d) x 785(l)
Weight Per Unit	181.9kg
Manufacturing Standard	BS EN 1340:2003
Density	2350 kg/m ³
GWP (total) kgCO ₂ e	19.38 kgCO ₂ e/unit
Dutch Ref.	TROTTOIRBOCHTBANDEN-26-30x50xL78.5-0.5m-VB
Type	Radius External
End Style	VB
Profile	260-300x500
Position	-
Face	Half-Battered
Face Angle	82°
Return Angle	-
Radius	0.5m
Number per 360	4
Slope Angle	-
Slope Gradient	-

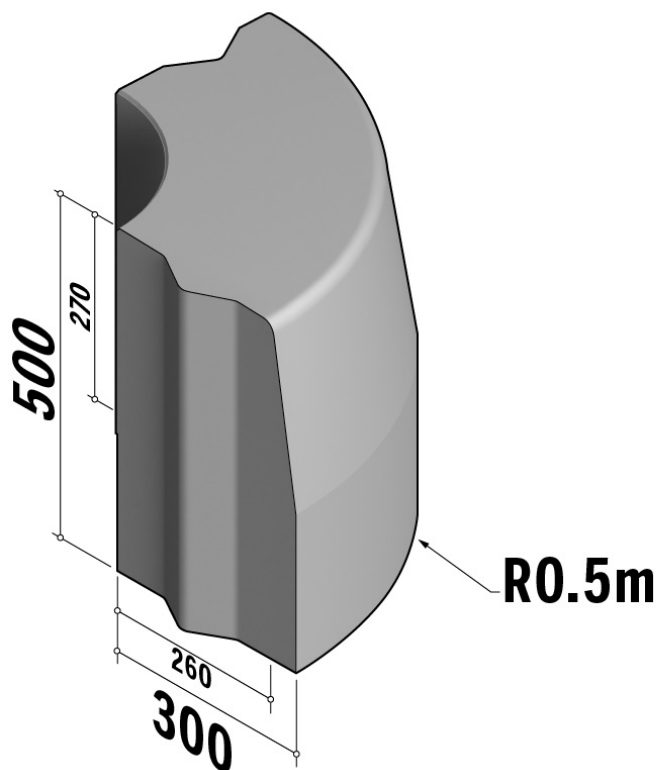

Active Travel Kerbs are available in a range of colours, finishes and materials.